

BXT M4 T (920 309)

- To be plugged into BLITZDUCTOR SP / XT base parts
- Easy maintenance and troubleshooting
- Measuring lines included





Basic circuit diagram

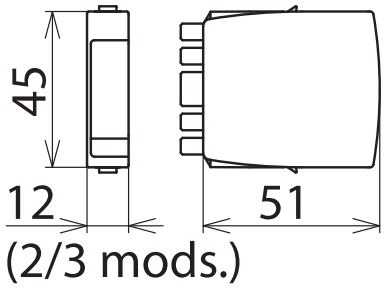

Dimension drawing

The plugged-in test/disconnection module interrupts the cable run of the lines connected to the BLITZDUCTOR SP / XT base part and leads them to a test socket at the front of the module. This allows measurements to be carried out in the installation without removing the lines from the base part.

Type	**BXT M4 T**
Part No.	**920 309**
Max. continuous operating voltage DC (U_c)	180 V
Max. continuous operating a.c. voltage (U_c)	127 V
Max. continuous operating voltage measuring lines (d.c.) (U_c)	60 V
Max. continuous operating voltage measuring lines (a.c.) (U_c)	42 V
Nominal current at 80°C (I_L)	1.0 A
Volume resistance	0.1 Ohm
Operating temperature range (T_U)	-40 °C ... +80 °C
Degree of protection (with plugged-in protection module)	IP 20
Pluggable into	base part
Test sockets	gold-plated, 1 mm
Enclosure material	polyamide PA 6.6
Colour	grey
Accessories	2 measuring lines (1 m), protective bag

Masterdata	
Net weight	14.1 g/pc(s)
GTIN	4013364109193
PU	1 pc(s)
Customs tariff number (Comb. Nomenclature EU)	85369010

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.

© DEHN, Inc. • 500 S Main Street, Suite 115 • Mooresville, NC 28115 • United States • Tel. +1 877-927-6510 • contactDEHN@dehn.us • www.dehn.us

: Tested • NEU: New • !: Discontinued Model
: Cross connector • : Longitudinal connector • : Parallel connector • : T connector • : Clamp for parallel connector • : Clamp for T connector
: Pipe clamp for parallel connector • : Pipe clamp for T connector • : Equipotential bonding bar • : Bridging component