
SDS 3 (923 116)

- Electrical isolation of insulated track sections and earthed parts of installations
- Safe equipotential bonding due to high-current-resistant welding of the electrodes in case of a short-circuit or earth fault at the overhead contact line
- Discharge of surges without short-circuit formation



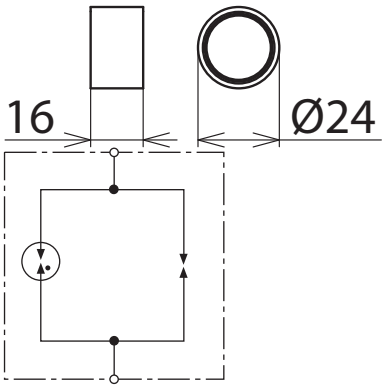

Dimension drawing

Voltage limiting device for a d.c. sparkover voltage of 550 V.

Type	**SDS 3**
Part No.	**923 116**
VLD type (EN 50122-1)	VLD-F
d.c. sparkover voltage (U_{ag})	550 V +/- 20 %
Impulse sparkover voltage	≤ 1000 V (1 kV/µs)
Lightning current discharge capacity (10/350 µs) 0.1x / 0.5x / 1x	2.5 kA
Lightning current carrying capability (10/350 µs)	25 kA
Additional short-circuit current rating	25 kA_{rms} / 100 ms
Operating temperature range (T_U)	-40 °C ... +80 °C
To be mounted with	mast adapter MA SDS M12 or SIEMENS Nr. 8WL6503-xx

Masterdata	
Net weight	42 g/pc(s)
GTIN	4013364085978
PU	1 pc(s)
Customs tariff number (Comb. Nomenclature EU)	85369095

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.