

BSP BAS 4 (926 304)

- Four-pole version for universal use with all types of BSP and BXT / BXTU protection modules
- Signal disconnection if the protection module is removed
- Universal design without protection elements



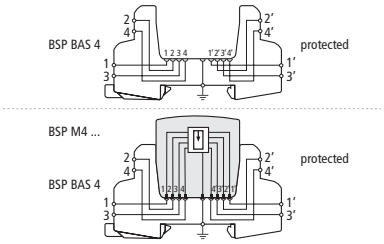

Basic circuit diagram

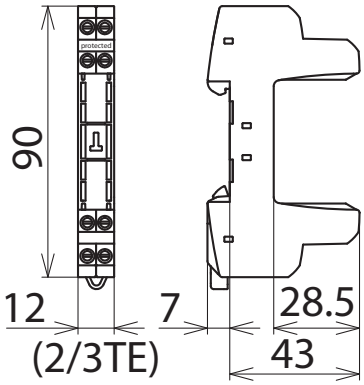

Dimension drawing

The BLITZDUCTOR SP base part is an extremely space-saving and universal four-pole terminal for the insertion of a protection module with signal disconnection if the protection module is removed. The snap-in mechanism at the supporting foot of the base part allows the protection module to be safely earthed via the DIN rail. Since no components of the protective circuit are situated in the base part, maintenance operation is only required for the protection modules.

Type	**BSP BAS 4**
Part No.	**926 304**
Operating temperature range (T_U)	-40 °C ... +80 °C
Degree of protection	IP 20
For mounting on	35 mm DIN rails acc. to EN 60715
Connection (input / output)	screw / screw
Signal disconnection	yes
Cross-sectional area, solid	0.08-4 mm²
Cross-sectional area, flexible	0.08-2.5 mm²
Tightening torque (terminals)	0.4 Nm
Earthing via	35 mm DIN rails acc. to EN 60715
Enclosure material	polyamide PA 6.6
Colour	yellow
Approvals	UL 497B, CSA *)

Masterdata	
Net weight	45 g/pc(s)
GTIN	4013364157125
PU	1 pc(s)
Customs tariff number (Comb. Nomenclature EU)	85369010

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.

*) only in connection with an approved protection module