
BCO BAS PCB FM (927 305)

- Integration of surge protection on printed circuit boards of electronic/electrical modules
- Easy and flexible use for BLITZDUCTORconnect protection modules
- Vibration-proof snapping of the modules into the base part



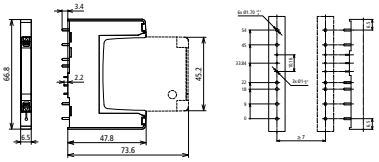

Dimension drawing

Two-pole arrester base for installation on printed circuit boards by means of soldering process for BLITZDUCTORconnect modules. With integrated remote signalling contact (floating changeover contact) for the condition monitoring of the protection modules.

Type	**BCO BAS PCB FM**
Part No.	**927 305**
Associated protection module	BCO MOD ...
Max. continuous operating DC voltage (module)	180 V
Operating temperature range (T_U)	-40°C to +80°C
For mounting on	Directly soldered onto the printed circuit board
Enclosure material	Polyamide PA 6.6
Colour	yellow
Degree of protection	IP 20 (with plug-in protection module)
Type of remote signalling contact	Changeover contact
Switching capacity (a.c.)	125 V / 0.1 A
Switching capacity (d.c.)	42 V / 0.5 A; 24 V / 1 A; 12 V / 2 A
Remote signalling contact soldering temperature	Max. 260°C / 5 sec.

Masterdata	
Net weight	12.07 g/pc(s)
GTIN	4013364454699
PU	1 pc(s)
Customs tariff number (Comb. Nomenclature EU)	85369010

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.

© DEHN, Inc. • 500 S Main Street, Suite 115 • Mooresville, NC 28115 • United States • Tel. +1 877-927-6510 • contactDEHN@dehn.us • www.dehn.us

: Tested • NEU: New • !: Discontinued Model
: Cross connector • : Longitudinal connector • : Parallel connector • : T connector • : Clamp for parallel connector • : Clamp for T connector
: Pipe clamp for parallel connector • : Pipe clamp for T connector • : Equipotential bonding bar • : Bridging component