

BCO CL4 BC 24 (927 954)

- LifeCheck arrester monitoring and integrated status indication
- Protection of multi-wire measuring circuits with a high nominal current; e.g. temperature, weighing systems
- For installation in conformity with the lightning protection zone concept at the boundaries from 0_A – 2 and higher



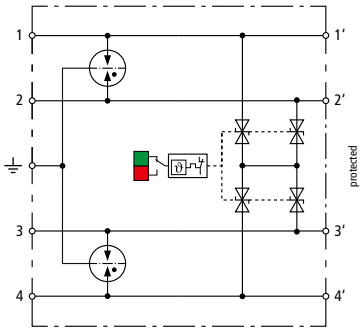

Basic circuit diagram

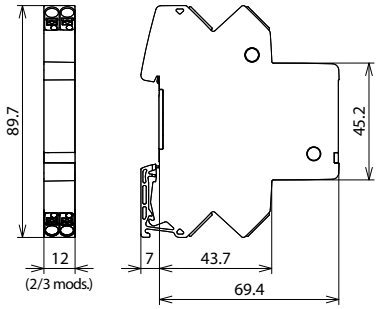

Dimension drawing

Space-saving, compact combined arrester with a width of 12 mm and push-in connection technology with status indication for protecting unearthed 4-conductor measuring circuits for IT systems and measuring and control systems.

Type	**BCO CL4 BC 24**
Part No.	**927 954**
Technical data	
SPD class	TYPE 1 P2
Impulse category	D1, C1, C2, C3, B2
Nominal voltage (U_N)	24 V
Max. continuous operating voltage DC (U_C)	36 V
Max. continuous operating a.c. voltage (U_C)	25.4 V
Nominal current at 80°C (I_L)	3 A
D1 Total lightning impulse current (10/350 µs) (I_{imp})	5 kA
D1 Lightning impulse current (10/350 µs) per line (I_{imp})	2.5 kA
C2 Total nominal discharge current (8/20 µs) (I_n)	20 kA
C2 Nominal discharge current (8/20 µs) per line (I_n)	10 kA
Voltage protection level line-PG for I_n C2 (U_P)	≤ 650 V
Voltage protection level line-line for I_n 1 kA C1 (U_P)	≤ 85 V
Voltage protection level line-line at 1 kV/µs C3 (U_P)	≤ 55 V
Voltage protection level line-PG at 1 kV/µs C3 (U_P)	≤ 600 V
Series resistance per line	0 Ohm
Cut-off frequency line-line at 100 ohms (f_G)	1.5 MHz
Capacitance line-line (C)	≤ 3 nF
Capacitance line-PG (C)	≤ 42 pF
Operating temperature range (T_U)	-40°C to +80°C
Operating state / fault indication	green / red
Degree of protection	IP 20
Connection (input / output)	Push-in / Push-in
Cross-sectional area, solid	0.2-2.5 mm²
Cross-sectional area, flexible	0.2-2.5 mm²
Earthing via	35 mm DIN rails acc. to EN 60715
Enclosure material	Polyamide PA 6.6, UL 94 V-0
Colour	yellow
Test standards	IEC 61643-21 / EN 61643-21
Approvals	UL 497B, SIL
SIL classification	up to SIL3 *)

Masterdata	
Net weight	57.52 g/pc(s)
GTIN	4013364485730
PU	1 pc(s)
Customs tariff number (Comb. Nomenclature EU)	85363010

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.

*) For details, see: www.dehn-international.com