

# DG MP TT 275 FM (942 315)

- Prewired complete unit consisting of a base part and remote signalling contact connection with push-in connection system and plug-in protection modules
- High discharge capacity due to heavy-duty zinc oxide varistors / spark gaps
- High reliability due to „“Thermo Dynamic Control““ SPD monitoring device



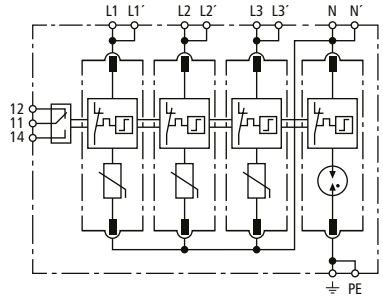


Basic circuit diagram

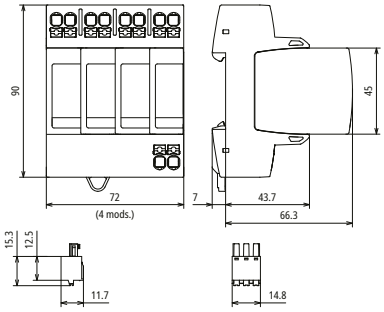


Dimension drawing

Modular surge arrester for use in TT and TN-S systems (3+1 configuration); with floating remote signalling contact.

| **Type** | **DG MP TT 275 FM** |
|---|---|
| **Part No.** | **942 315** |
| **Technical data** | |
| SPD according to EN 61643-11 / IEC 61643-11 | type 2 + type 3 / class II + class III |
| Energy coordination with terminal equipment (≤ 10 m) | type 2 + type 3 |
| Nominal voltage (a.c.) ($U_N$) | 230 / 400 V (50 / 60 Hz) |
| Max. continuous operating voltage (a.c.) [L-N] ($U_C$) | 275 V (50 / 60 Hz) |
| Max. continuous operating voltage (a.c.) [N-PE] ($U_C$) | 255 V (50 / 60 Hz) |
| Nominal discharge current (8/20 µs) ($I_n$) | 20 kA |
| Max. discharge current (8/20 µs) ($I_{max}$) | 40 kA |
| Combination wave [L-N] (Uoc) | 20 kV |
| Combination wave [N-PE] (Uoc) | 6 kV |
| Nominal load current for “V-connection” ($I_L$) | 40 A |
| Voltage protection level [L-N]/[N-PE] ($U_p$) | ≤ 1.5 / ≤ 1.5 kV |
| Voltage protection level [L-N]/[N-PE] at 5 kA ($U_p$) | ≤ 1 / ≤ 1.5 kV |
| Follow current extinguishing capability [N-PE] ($I_{Fi}$) | 100 $A_{eff}$ |
| Response time [L-N] ($t_A$) | ≤ 25 ns |
| Response time [N-PE] ($t_A$) | ≤ 100 ns |
| Max. mains-side overcurrent protection | 125 A gG |
| Max. mains-side overcurrent protection with “V-connection” | 40 A gG |
| Max. mains-side overcurrent protection with stub wiring (double connection 2 x 10 mm²) | 125 A gG |
| Short-circuit withstand capability for max. mains-side overcurrent protection ($I_{SCCR}$) | 50 $kA_{rms}$ |
| Temporary overvoltage (TOV) [L-N] ($U_T$) – Characteristic | 335 V / 5 sec. – Festigkeit<br>440 V / 120 min. – sicherer Ausfall |
| Temporary overvoltage (TOV) [N-PE] ($U_T$) - Characteristic | 1200 V / 200 ms – withstand |
| Operating temperature range ($T_U$) | -40 °C ... +80 °C |
| Operating state / fault indication | green / red |
| Number of ports | 1 |
| Cross-sectional area (min.) | 1,5 mm² eindrähtig<br>6 mm² feindrähtig |
| Cross-sectional area (max.) | 10 mm² solid / flexible |
| Cross-sectional area (min.) with wire end ferrule | 1.5 mm² |
| Cross-sectional area (max.) with wire end ferrule | 6 mm² |
| Cross-sectional area (max.) with wire end ferrule without collar | 10 mm² |
| For mounting on | 35 mm DIN rails acc. to EN 60715 |
| Enclosure material | thermoplastic, red, UL 94 V-0 |
| Place of installation | indoor installation |
| Degree of protection | IP 20 |
| Capacity | 4 Standard DIN module, DIN 43880 |

© DEHN, Inc. • 500 S Main Street, Suite 115 • Mooresville, NC 28115 • United States • Tel. +1 877-927-6510 • contactDEHN@dehn.us • www.dehn.us

: Tested • NEU: New • !: Discontinued Model
: Cross connector • : Longitudinal connector • : Parallel connector • : T connector • : Clamp for parallel connector • : Clamp for T connector
: Pipe clamp for parallel connector • : Pipe clamp for T connector • : Equipotential bonding bar • : Bridging component

| Technical data | |
|---|---|
| Approvals | KEMA, VDE |
| Type of remote signalling contact | changeover contact |
| Switching capacity (a.c.) | 250 V / 0.5 A |
| Switching capacity (d.c.) | 250 V / 0.1 A; 125 V / 0.2 A; 75 V / 0.5 A |
| Cross-sectional area for remote signalling terminals | max. 1.5 mm² solid / flexible |
| **Extended technical data** | |
| Lightning impulse current (10/350 µs) [N-PE] ($I_{imp}$) | 12 kA |
| Voltage protection level [L-PE] ($U_p$) | 1.5 kV |

| Masterdata | |
|---|---|
| Net weight | 346.63 g/pc(s) |
| GTIN | 4013364477162 |
| PU | 1 pc(s) |
| Customs tariff number (Comb. Nomenclature EU) | 85363030 |

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.