

DV MOD 255 (951 001)

- Maximum system availability due to RADAX Flow follow current limitation
- Easy replacement of protection modules without tools due to module locking system with module release button





Basic circuit diagram

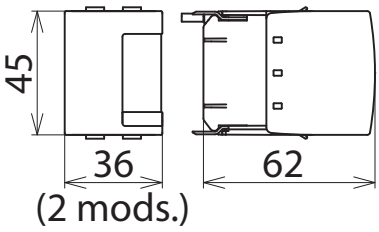

Dimension drawing

Spark-gap-based protection module

Type	**DV MOD 255**
Part No.	**951 001**
Max. continuous operating a.c. voltage (U_C)	264 V
Lightning impulse current (10/350 µs) (I_{imp})	25 kA
Specific energy (W/R)	156.25 kJ/ohms
Follow current extinguishing capability [L-N] AC (I_{fi})	50 kA_{rms}
Follow current limitation / Selectivity	no tripping of a 20 A gG fuse up to 50 kA_{rms} (prosp.)
For mounting on	DV M TN ... devices

Masterdata	
Net weight	192 g/pc(s)
GTIN	4013364108066
PU	1 pc(s)
Customs tariff number (Comb. Nomenclature EU)	85363090

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.

© DEHN, Inc. • 500 S Main Street, Suite 115 • Mooresville, NC 28115 • United States • Tel. +1 877-927-6510 • contactDEHN@dehn.us • www.dehn.us

: Tested • NEU: New • : Discontinued Model
: Cross connector • : Longitudinal connector • : Parallel connector • : T connector • : Clamp for parallel connector • : Clamp for T connector
: Pipe clamp for parallel connector • : Pipe clamp for T connector • : Equipotential bonding bar • : Bridging component