


DV MOD NPE 50 (951 050)

- RADAX Flow spark gap technology
- Easy replacement of protection modules without tools due to module locking system with module release button

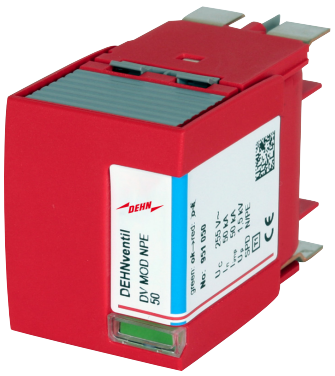



Basic circuit diagram

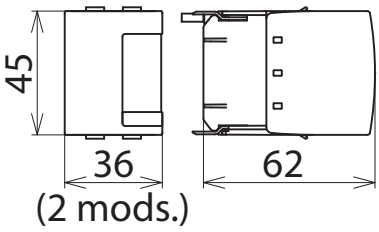

Dimension drawing

50 kA N-PE spark-gap-based protection module

Type	DV MOD NPE 50
Part No.	**951 050**
Max. continuous operating a.c. voltage (U_C)	255 V
Lightning impulse current (10/350 µs) (I_{imp})	50 kA
Specific energy (W/R)	625.00 kJ/ohms
Follow current extinguishing capability [N-PE] AC (I_{fi})	100 A_{eff}
For mounting on	DV M TT 2P devices

Masterdata	
Net weight	170.6 g/pc(s)
GTIN	4013364108073
PU	1 pc(s)
Customs tariff number (Comb. Nomenclature EU)	85363030

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.