


DG M TT 2P 320 (952 130)

- Prewired complete unit consisting of a base part and plug-in protection modules
- High discharge capacity due to heavy-duty zinc oxide varistors / spark gaps
- High reliability due to „“Thermo Dynamic Control““ SPD monitoring device

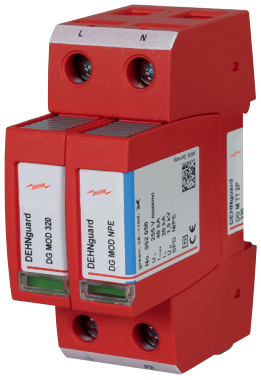



Basic circuit diagram

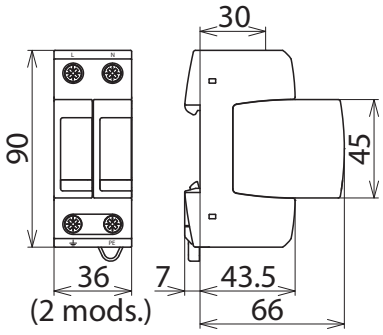

Dimension drawing

Modular surge arrester for use in single-phase TT and TN systems (1+1 configuration).

Type	DG M TT 2P 320
Part No.	**952 130**
Technical data	
SPD according to EN 61643-11 / IEC 61643-11	type 2 / class II
Energy coordination with terminal equipment (≤ 10 m)	type 2 + type 3
Nominal voltage (a.c.) (U_N)	230 V (50 / 60 Hz)
Max. continuous operating voltage (a.c.) [L-N] (U_C)	320 V (50 / 60 Hz)
Max. continuous operating voltage (a.c.) [N-PE] (U_C)	255 V (50 / 60 Hz)
Nominal discharge current (8/20 µs) (I_n)	20 kA
Max. discharge current (8/20 µs) (I_{max})	40 kA
Voltage protection level [L-N]/[N-PE] (U_p)	≤ 1.5 / ≤ 1.5 kV
Voltage protection level [L-N]/[N-PE] at 5 kA (U_p)	≤ 1,2 / ≤ 1,5 kV
Follow current extinguishing capability [N-PE] (I_{Fi})	100 A_{eff}
Response time [L-N] (t_A)	≤ 25 ns
Response time [N-PE] (t_A)	≤ 100 ns
Max. mains-side overcurrent protection	125 A gG
Short-circuit withstand capability for max. mains-side overcurrent protection (I_{SCCR})	25 kA_{rms}
Temporary overvoltage (TOV) [L-N] (U_T) – Characteristic	335 V / 5 sec. – Festigkeit 440 V / 120 min. – sicherer Ausfall
Temporary overvoltage (TOV) [N-PE] (U_T) - Characteristic	1200 V / 200 ms – withstand
Operating temperature range (T_U)	-40 °C ... +80 °C
Operating state / fault indication	green / red
Number of ports	1
Cross-sectional area (min.)	1.5 mm^2 solid / flexible
Cross-sectional area (max.)	35 mm^2 stranded / 25 mm^2 flexible
For mounting on	35 mm DIN rails acc. to EN 60715
Enclosure material	thermoplastic, red, UL 94 V-0
Place of installation	indoor installation
Degree of protection	IP 20
Capacity	2 Standard DIN module, DIN 43880
Approvals	KEMA
Extended technical data	
Lightning impulse current (10/350 µs) [N-PE] (I_{imp})	12 kA
Voltage protection level [L-PE] (U_p)	1.75 kV

Masterdata	
Net weight	247.2 g/pc(s)
GTIN	4013364128521
PU	1 pc(s)
Customs tariff number (Comb. Nomenclature EU)	85363030

© DEHN, Inc. • 500 S Main Street, Suite 115 • Mooresville, NC 28115 • United States • Tel. +1 877-927-6510 • contactDEHN@dehn.us • www.dehn.us

: Tested • NEU: New • !: Discontinued Model
: Cross connector • : Longitudinal connector • : Parallel connector • : T connector • : Clamp for parallel connector • : Clamp for T connector
: Pipe clamp for parallel connector • : Pipe clamp for T connector • : Equipotential bonding bar • : Bridging component

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.

© DEHN, Inc. • 500 S Main Street, Suite 115 • Mooresville, NC 28115 • United States • Tel. +1 877-927-6510 • contactDEHN@dehn.us • www.dehn.us

: Tested • NEU: New • : Discontinued Model
: Cross connector • : Longitudinal connector • : Parallel connector • : T connector • : Clamp for parallel connector • : Clamp for T connector
: Pipe clamp for parallel connector • : Pipe clamp for T connector • : Equipotential bonding bar • : Bridging component