

DG M WE 600 (952 302)

- Prewired complete unit consisting of a base part and plug-in protection modules
- High discharge capacity due to heavy-duty zinc oxide varistors / spark gaps
- High reliability due to „“Thermo Dynamic Control““ SPD monitoring device





Basic circuit diagram

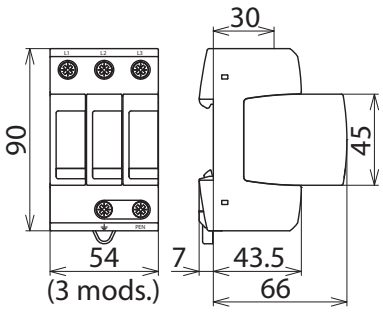

Dimension drawing

Modular three-pole surge arrester for use in wind turbines with a rated varistor voltage U_{mov} = 750 V a.c.; FM version with floating remote signalling contact.

Type	**DG M WE 600**
Part No.	**952 302**
Technical data	
SPD according to EN 61643-11 / IEC 61643-11	type 2 / class II
Energy coordination with terminal equipment (≤ 10 m)	type 2 + type 3
Nominal voltage (a.c.) (U_N)	480 V (50 / 60 Hz)
Max. continuous operating voltage (AC) (U_C)	600 V (50 / 60 Hz)
Rated varistor voltage (U_{mov})	750 V
Nominal discharge current (8/20 µs) (I_n)	15 kA
Max. discharge current (8/20 µs) (I_{max})	25 kA
Voltage protection level (U_p)	≤ 3 kV
Voltage protection level at 5 kA (U_p)	≤ 2.5 kV
Response time (t_A)	≤ 25 ns
Max. mains-side overcurrent protection	100 A gG
Short-circuit withstand capability for max. mains-side overcurrent protection (I_{SCCR})	25 kA_{rms}
Temporary overvoltage (U_T) – characteristic	900 V / 5 sec. – Festigkeit 915 V / 120 min. – sicherer Ausfall
Operating temperature range (T_U)	-40 °C ... +80 °C
Operating state / fault indication	green / red
Number of ports	1
Cross-sectional area (min.)	1.5 mm^2 solid / flexible
Cross-sectional area (max.)	35 mm^2 stranded / 25 mm^2 flexible
For mounting on	35 mm DIN rails acc. to EN 60715
Enclosure material	thermoplastic, red, UL 94 V-0
Place of installation	indoor installation
Degree of protection	IP 20
Capacity	3 Standard DIN module, DIN 43880
Approvals	KEMA, UL

Masterdata	
Net weight	385.6 g/pc(s)
GTIN	4013364113305
PU	1 pc(s)
Customs tariff number (Comb. Nomenclature EU)	85363030

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.

© DEHN, Inc. • 500 S Main Street, Suite 115 • Mooresville, NC 28115 • United States • Tel. +1 877-927-6510 • contactDEHN@dehn.us • www.dehn.us

: Tested • NEU: New • !: Discontinued Model
: Cross connector • : Longitudinal connector • : Parallel connector • : T connector • : Clamp for parallel connector • : Clamp for T connector
: Pipe clamp for parallel connector • : Pipe clamp for T connector • : Equipotential bonding bar • : Bridging component