

DG ME YPV SCI 1500 FM (952 525)

- Prewired modular complete unit for use in photovoltaic systems consisting of a base part and plug-in protection modules
- Combined disconnection and short-circuiting device with safe electrical isolation in the protection module (patented SCI principle)
- Tried and tested fault-resistant Y circuit





Basic circuit diagram

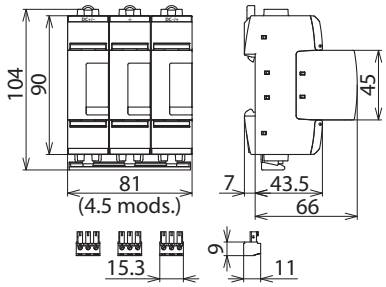

Dimension drawing

Modular multipole surge arrester with three-step d.c. switching device for PV systems with remote signalling contact for monitoring device (floating changeover contact).

Type	**DG ME YPV SCI 1500 FM**
Part No.	**952 525**
SPD according to EN 61643-31 / IEC 61643-31	type 2 / class II
Max. PV voltage (U_{CPV})	1500 V
Short-circuit withstand capability (I_{SCPV})	10 kA
Total discharge current (8/20 µs) (I_{total})	25 kA
Nominal discharge current (8/20 µs) [(DC+/DC-) --> PE] (I_n)	12.5 kA
Voltage protection level (U_p)	≤ 6 kV
Response time (t_A)	≤ 25 ns
Operating temperature range (T_U)	-40 °C ... +80 °C
Operating state / fault indication	green / red
Number of ports	1
Cross-sectional area (min.)	1.5 mm² solid / flexible
Cross-sectional area (max.)	35 mm² stranded / 25 mm² flexible
For mounting on	35 mm DIN rails acc. to EN 60715
Enclosure material	thermoplastic, red, UL 94 V-0
Place of installation	indoor installation
Degree of protection	IP 20
Capacity	4.5 Standard DIN module, DIN 43880
Approvals	KEMA, UL
Type of remote signalling contact	changeover contact
Switching capacity (a.c.)	250 V / 0.5 A
Switching capacity (d.c.)	250 V / 0.1 A, 125 V / 0.2 A, 75 V / 0.5 A
Cross-sectional area for remote signalling terminals	max. 1.5 mm² solid / flexible

Masterdata	
Net weight	521 g/pc(s)
GTIN	4013364149076
PU	1 pc(s)
Customs tariff number (Comb. Nomenclature EU)	85354000

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.