

STAK 4X10 (952 588)

- Allows a V-connection (connection of four conductors) of surge protective devices up to 10 mm²
- Allows EMC-optimised feed-through wiring according to DIN VDE 0100-534

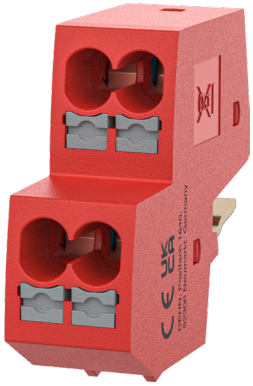

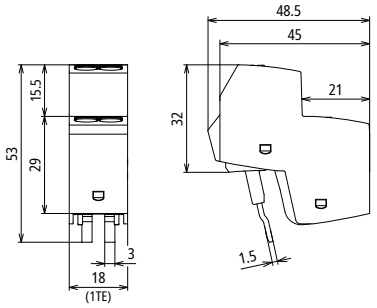

Dimension drawing

Push-in terminal for EMC-optimised feed-through wiring of surge arresters as per DIN VDE 0100-534.

Type	STAK 4X10
Part No.	**952 588**
Max. continuous operating a.c. voltage (U_C)	275 V
Max. PV voltage (U_{CPV})	1500 V
Lightning impulse current (10/350 µs) (I_{imp})	6.25 kA
Nominal discharge current (8/20 µs) (I_n)	20 kA
Max. discharge current (8/20 µs) (I_{max})	40 kA
Short-circuit withstand capability (I_{SCPV})	10 kA
Short-circuit withstand strength (I_{SCCR})	50 kA
Nominal load current (I_L)	40 A
Operating temperature range (T_U)	-40 °C ... +80 °C
Cross-sectional area (min.)	1.5 mm² solid / 6 mm² fine-stranded
Cross-sectional area (max.)	10 mm² solid / fine-stranded
Cross-sectional area (min.) with wire end ferrule	1,5 mm²
Cross-sectional area (max.) with wire end ferrule	6 mm²
Cross-sectional area (max.) with wire end ferrule without collar	10 mm²
Place of installation	Indoor
Capacity	1 Standard DIN module, DIN 43880
Base part height with STAK 4X10	57 mm

Masterdata	
Net weight	35.67 g/pc(s)
GTIN	4013364526624
PU	1 pc(s)
Customs tariff number (Comb. Nomenclature EU)	85369010

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.