
DG PCB 510 UL FM (952 616)

- Integration of DEHNguard protection modules in the PCBs of electronic / electrical devices
- Easy and flexible use for all circuit configurations
- Coded base part and protection module ensure against installing an incorrect module



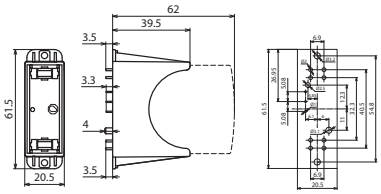

Dimension drawing

Single-pole base for DEHNguard modules to be mounted on the PCBs of devices.

NEW

Type	DG PCB 510 UL FM
Part No.	**952 616**
Associated protection module	DG PLU 510 (Part No. 908 013)
Max. continuous operating voltage (a.c.) (module)	510 V
Operating temperature range (T_U)	-40°C to +85°C
For mounting on	directly soldered into PCB
Enclosure material	thermoplastic, red, UL 94 V-0
Degree of protection	IP 20 (protection module plugged in)
Type of remote signalling contact	changeover contact
Switching capacity (a.c.)	125 V / 0,1 A
Switching capacity (d.c.)	42 V / 0,5 A; 24 V / 1 A; 12 V / 2 A
Remote signalling contact soldering temperature	max. 260°C / 5 sec.

Masterdata	
Net weight	18.2 g/pc(s)
GTIN	4013364535800
PU	1 pc(s)
Customs tariff number (Comb. Nomenclature EU)	85366930

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.

© DEHN, Inc. • 500 S Main Street, Suite 115 • Mooresville, NC 28115 • United States • Tel. +1 877-927-6510 • contactDEHN@dehn.us • www.dehn.us

: Tested • NEW: New • : Discontinued Model
: Cross connector • : Longitudinal connector • : Parallel connector • : T connector • : Clamp for parallel connector • : Clamp for T connector
: Pipe clamp for parallel connector • : Pipe clamp for T connector • : Equipotential bonding bar • : Bridging component