
DK 25 (952 699)

- Allows changing of the wiring level
- For a lightning current suitable installation of arrester combinations





Basic circuit diagram

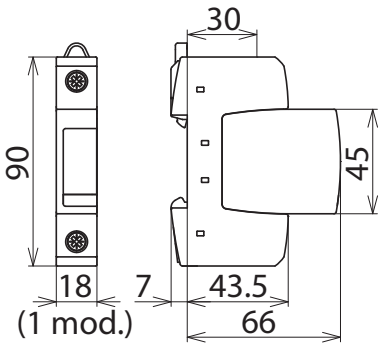

Dimension drawing

Feed-through terminal for busbar wiring.

Type	DK 25
Part No.	**952 699**
Nominal a.c./d.c. voltage (U_N)	500 V
Nominal load current (a.c.) (I_L)	100 A
Test current according to EN 60947-7-1	100 A
Lightning impulse current (10/350 µs)	100 kA
Rated insulation voltage (U_i)	630 V
Rated impulse withstand voltage (U_{imp})	6 kV
Operating temperature range (T_U)	-40 °C ... +80 °C
Cross-sectional area (min.)	1.5 mm² solid / flexible
Cross-sectional area (max.)	25 mm² stranded / 16 mm² flexible
For mounting on	35 mm DIN rails according to EN 60715
Enclosure material	thermoplastic, red, UL 94 V-0
Degree of protection	IP 20
Dimensions	1 module, DIN 43880

Masterdata	
Net weight	103 g/pc(s)
GTIN	4013364127906
PU	1 pc(s)
Customs tariff number (Comb. Nomenclature EU)	85369095

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.

© DEHN, Inc. • 500 S Main Street, Suite 115 • Mooresville, NC 28115 • United States • Tel. +1 877-927-6510 • contactDEHN@dehn.us • www.dehn.us

: Tested • NEU: New • !: Discontinued Model
: Cross connector • : Longitudinal connector • : Parallel connector • : T connector • : Clamp for parallel connector • : Clamp for T connector
: Pipe clamp for parallel connector • : Pipe clamp for T connector • : Equipotential bonding bar • : Bridging component