

DR M 2P 255 SN1802 (953 228)

- Two-pole surge arrester consisting of a base part and a plug-in protection module
- High discharge capacity due to heavy-duty zinc oxide varistor / spark gap combination
- Energy-coordinated within the Red/Line product family





Basic circuit diagram

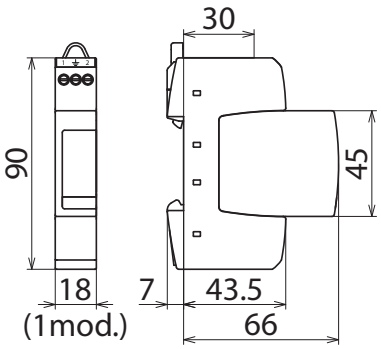

Dimension drawing

Two-pole surge arrester consisting of a base part and a plug-in protection module. Can be used for systems with a load current up to 32 A.

Type	DR M 2P 255 SN1802
Part No.	**953 228**
Technical data	
SPD according to EN 61643-11 / IEC 61643-11	type 3 / class III
Nominal voltage (a.c.) (U_N)	230 V (50 / 60 Hz)
Max. continuous operating voltage (AC) (U_C)	255 V (50 / 60 Hz)
Max. continuous operating voltage DC (U_C)	255 V
Nominal discharge current (8/20 µs) (I_n)	3 kA
Total discharge current (8/20 µs) [L+N-PE] (I_{total})	5 kA
Combination wave (U_{OC})	6 kV
Combination wave [L+N-PE] ($U_{OC\ total}$)	10 kV
Voltage protection level [L-N] / [L/N-PE] (U_P)	≤ 1250 / ≤ 1500 V
Response time [L-N] (t_A)	≤ 25 ns
Response time [L/N-PE] (t_A)	≤ 100 ns
Max. mains-side overcurrent protection	32 A gG or B 32 A
Short-circuit withstand capability for mains-side overcurrent protection with 32 A gG (I_{SCCR})	6 kA_{rms}
Temporary overvoltage (TOV) [L-N] (U_T) – Characteristic	335 V / 5 sec. – Festigkeit 440 V / 120 min. – sicherer Ausfall
Temporary overvoltage (TOV) [L/N-PE] (U_T) – Characteristic	335 V / 120 min. – Festigkeit 440 V / 5 sec. – Festigkeit
Temporary overvoltage (TOV) [L+N-PE] (U_T) – Characteristic	1200 V + U_{REF} / 200 ms – safe failure
Operating temperature range (T_U)	-40 °C ... +80 °C
Operating state / fault indication	green / red
Number of ports	1
Cross-sectional area (min.)	0.5 mm^2 solid / flexible
Cross-sectional area (max.)	4 mm^2 solid / 2.5 mm^2 flexible
For mounting on	35 mm DIN rails acc. to EN 60715
Enclosure material	thermoplastic, red, UL 94 V-0
Place of installation	indoor installation
Degree of protection	IP 20
Capacity	1 Standard DIN module, DIN 43880

Masterdata	
Net weight	79 g/pc(s)
GTIN	4013364158986
PU	1 pc(s)
Customs tariff number (Comb. Nomenclature EU)	85363030

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.

© DEHN, Inc. • 500 S Main Street, Suite 115 • Mooresville, NC 28115 • United States • Tel. +1 877-927-6510 • contactDEHN@dehn.us • www.dehn.us

: Tested • NEU: New • !: Discontinued Model
: Cross connector • : Longitudinal connector • : Parallel connector • : T connector • : Clamp for parallel connector • : Clamp for T connector
: Pipe clamp for parallel connector • : Pipe clamp for T connector • : Equipotential bonding bar • : Bridging component

Protection module upon request

© DEHN, Inc. • 500 S Main Street, Suite 115 • Mooresville, NC 28115 • United States • Tel. +1 877-927-6510 • contactDEHN@dehn.us • www.dehn.us

: Tested • NEU: New • !: Discontinued Model
: Cross connector • : Longitudinal connector • : Parallel connector • : T connector • : Clamp for parallel connector • : Clamp for T connector
: Pipe clamp for parallel connector • : Pipe clamp for T connector • : Equipotential bonding bar • : Bridging component