

DV MOD TT 255 (956 031)

- High discharge capacity due to heavy-duty RAC spark gap
- Easy replacement of protection modules without tools due to module locking system with module release button





Basic circuit diagram

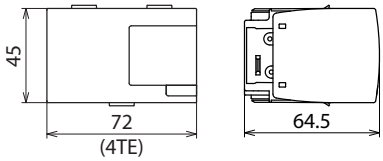

Dimension drawing

RAC spark-gap-based protection module

NEW

Type	DV MOD TT 255
Part No.	**956 031**
Max. continuous operating a.c. voltage (U_c)	255 V
Lightning impulse current (10/350 µs) (I_{imp})	100 kA
Specific energy (W/R)	156.25 kJ/ohms
Follow current extinguishing capability [L-N] AC (I_{fi})	50 kA_{rms}
Follow current limitation / Selectivity	No tripping of a 32 A gG fuse up to 50 kA_{rms} (prosp.)
Short-circuit current rating [L-N]/[N-PE] (I_{SCCR})	50 kA_{rms} / 100 A_{rms}
For mounting on	DV M2 TN ... devices

Masterdata	
Net weight	306.83 g/pc(s)
GTIN	4013364546943
PU	1 pc(s)
Customs tariff number (Comb. Nomenclature EU)	85363090

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.

© DEHN, Inc. • 500 S Main Street, Suite 115 • Mooresville, NC 28115 • United States • Tel. +1 877-927-6510 • contactDEHN@dehn.us • www.dehn.us

: Tested • NEW: New • : Discontinued Model
: Cross connector • : Longitudinal connector • : Parallel connector • : T connector • : Clamp for parallel connector • : Clamp for T connector
: Pipe clamp for parallel connector • : Pipe clamp for T connector • : Equipotential bonding bar • : Bridging component