

DB M MOD 150 (961 001)

- Maximum system availability due to RADAX Flow follow current limitation
- Easy replacement of protection modules without tools due to module locking system with module release button





Basic circuit diagram

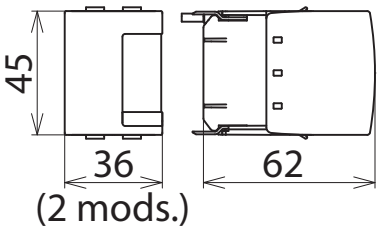

Dimension drawing

Spark-gap-based protection module

Type	DB M MOD 150
Part No.	**961 001**
Max. continuous operating a.c. voltage (U_C)	150 V
Lightning impulse current (10/350 µs) (I_{imp})	35 kA
Specific energy (W/R)	306.25 kJ/ohms
Follow current extinguishing capability (a.c.) (I_{fi})	35 kA_{rms}
Follow current limitation / Selectivity	no tripping of a 32 A gG fuse up to 50 kA_{rms} (prosp.)

Masterdata	
Net weight	172.9 g/pc(s)
GTIN	4013364118584
PU	1 pc(s)
Customs tariff number (Comb. Nomenclature EU)	85363090

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.