
DGP M MOD 255 (961 010)

- RADAX Flow spark gap technology
- Easy replacement of protection modules without tools due to module locking system with module release button





Basic circuit diagram

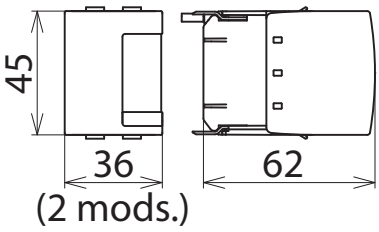

Dimension drawing

100 kA N-PE spark-gap-based protection module for all devices of the modular DEHNgap M family.

Type	**DGP M MOD 255**
Part No.	**961 010**
Max. continuous operating a.c. voltage (U_c)	255 V
Lightning impulse current (10/350 µs) (I_{imp})	100 kA
Specific energy (W/R)	2.50 MJ/ohms
Follow current extinguishing capability [N-PE] AC (I_{fi})	100 A_{eff}

Masterdata	
Net weight	170 g/pc(s)
GTIN	4013364118744
PU	1 pc(s)
Customs tariff number (Comb. Nomenclature EU)	85363030

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.

© DEHN, Inc. • 500 S Main Street, Suite 115 • Mooresville, NC 28115 • United States • Tel. +1 877-927-6510 • contactDEHN@dehn.us • www.dehn.us

: Tested • NEU: New • !: Discontinued Model
: Cross connector • : Longitudinal connector • : Parallel connector • : T connector • : Clamp for parallel connector • : Clamp for T connector
: Pipe clamp for parallel connector • : Pipe clamp for T connector • : Equipotential bonding bar • : Bridging component