


DV ACI MOD TNC 264 (961 030)

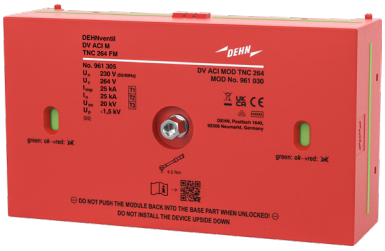



Basic circuit diagram

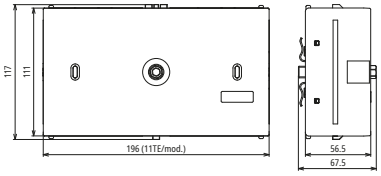

Dimension drawing

Spark-gap-based protection module with ACI technology

Type	DV ACI MOD TNC 264
Part No.	**961 030**
Max. continuous operating a.c. voltage (U_c)	264 V
Lightning impulse current (10/350 µs) [L1+L2+L3-PEN] (I_{total})	75 kA
Specific energy [L1+L2+L3-PEN] (W/R)	1.40 MJ/Ohm
Lightning impulse current (10/350 µs) [L-PEN] (I_{imp})	25 kA
Specific energy [L-PEN] (W/R)	156,25 kJ/Ohm
Short-circuit current rating [L-N]/[N-PE] (I_{SCCR})	50 kA_{rms}
For mounting on	DEHNventil ACI M TNC 264 FM (Part No. 961 305)

Masterdata	
Net weight	1.51 kg/pc(s)
GTIN	4013364513624
PU	1 pc(s)
Customs tariff number (Comb. Nomenclature EU)	85363090

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.

© DEHN, Inc. • 500 S Main Street, Suite 115 • Mooresville, NC 28115 • United States • Tel. +1 877-927-6510 • contactDEHN@dehn.us • www.dehn.us

: Tested • NEU: New • : Discontinued Model
: Cross connector • : Longitudinal connector • : Parallel connector • : T connector • : Clamp for parallel connector • : Clamp for T connector
: Pipe clamp for parallel connector • : Pipe clamp for T connector • : Equipotential bonding bar • : Bridging component