


DV ACI MOD TNS 264 (961 040)

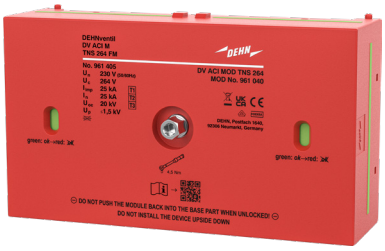



Basic circuit diagram

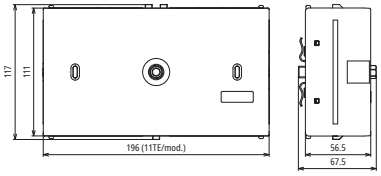

Dimension drawing

Spark-gap-based protection module with ACI technology

Type	DV ACI MOD TNS 264
Part No.	**961 040**
Max. continuous operating a.c. voltage (U_c)	264 V
Lightning impulse current (10/350 µs) [L1+L2+L3+N-PE] (I_{total})	100 kA
Specific energy [L1+L2+L3+N-PE] (W/R)	2.50 MJ/ohms
Lightning impulse current (10/350 µs) [L, N-PE] (I_{imp})	25 kA
Specific energy [L,N-PE] (W/R)	156.25 kJ/ohms
Follow current extinguishing capability (a.c.) (I_{fi})	50 kA_{rms}
Short-circuit strength [L-PE]/[N-PE] (I_{SCCR})	50 kA_{eff}
For mounting on	DEHNventil ACI M TNS 264 FM (Part No. 961 405)

Masterdata	
Net weight	1.65 kg/pc(s)
GTIN	4013364513631
PU	1 pc(s)
Customs tariff number (Comb. Nomenclature EU)	85363090

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.