

DB M 1 150 FM (961 115)

- Coordinated spark-gap-based lightning current arrester consisting of a base part and a plug-in protection module
- Maximum system availability due to RADAX Flow follow current limitation
- Without additional cable length directly coordinated with DEHNguard surge protective device





Basic circuit diagram

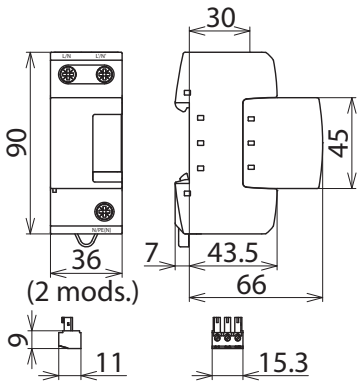

Dimension drawing

Coordinated and modular single-pole lightning current arrester with high follow current limitation; with remote signalling contact for the monitoring system (floating changeover contact).

Type	**DB M 1 150 FM**
Part No.	**961 115**
Standards	
Certification	UL
UL Standard	UL 1449 5th edition
UL File Number	E319777
Test values according to UL 1449	
SPD classification according to UL 1449	Component (Type 4) SPD for SPD Type 2 application
Rated A.C. Voltage	120 V
Frequency	60 Hz
Max. Continuous Operating Voltage (AC) [L-N] (MCOV)	150 V
Voltage Protection Rating [L-N] (VPR)	1500 V
Amperage (series connection)	115 A
Nominal discharge current (8/20µs) (I_n)	20 kA
Operating Temperature Range	-40°C...+85°C
Cross-sectional area (L/N, L'/N', N/PE(N))	AWG 8 Cu stranded
Torque (L/N, L'/N', N/PE(N))	65 □□□□□□
Connection of remote signalling contact	Class 2 circuits only
Cross-sectional area (remote indicator)	AWG 14-22
Torque (remote indicator)	3 Lbs-in
Technical data	
SPD according to EN 61643-11 / IEC 61643-11	type 1 / class I
Nominal voltage (a.c.) (U_N)	120 V (50 / 60 Hz)
Max. continuous operating voltage (AC) (U_C)	150 V (50 / 60 Hz)
Lightning impulse current (10/350 µs) (I_{imp})	35 kA
Specific energy (W/R)	306.25 kJ/ohms
Voltage protection level (U_P)	≤ 1.5 kV
Follow current extinguishing capability (a.c.) (I_{fi})	35 kA_{rms}
Follow current limitation / Selectivity	no tripping of a 32 A gG fuse up to 35 kA_{rms} (prosp.)
Response time (t_A)	≤ 100 ns
Max. backup fuse (L) up to I_K = 35 kA_{rms} (t_a ≤ 0.2 s)	500 A gG
Max. backup fuse (L) up to I_K = 35 kA_{rms} (t_a ≤ 5 s)	315 A gG
Max. backup fuse (L) for I_K > 35 kA_{rms}	200 A gG
Max. backup fuse (L-L')	125 A gG
Temporary overvoltage (U_T) – characteristic	230 V / 120 min. – withstand
Operating temperature range (parallel connection) (T_{UP})	-40 °C ... +80 °C
Operating temperature range (through-wiring) (T_{US})	-40 °C ... +60 °C
Operating state / fault indication	green / red
Number of ports	1
Cross-sectional area (L/N, L'/N', N/PE(N)) (min.)	10 mm^2 solid / flexible

© DEHN, Inc. • 500 S Main Street, Suite 115 • Mooresville, NC 28115 • United States • Tel. +1 877-927-6510 • contactDEHN@dehn.us • www.dehn.us

: Tested • NEU: New • !: Discontinued Model
: Cross connector • : Longitudinal connector • : Parallel connector • : T connector • : Clamp for parallel connector • : Clamp for T connector
: Pipe clamp for parallel connector • : Pipe clamp for T connector • : Equipotential bonding bar • : Bridging component

Technical data	
Cross-sectional area (L/N, N/PE(N)) (max.)	50 mm² stranded / 35 mm² flexible
Cross-sectional area (L'/N') (max.)	35 mm² stranded / 25 mm² flexible
For mounting on	35 mm DIN rails acc. to EN 60715
Enclosure material	thermoplastic, red, UL 94 V-0
Place of installation	indoor installation
Degree of protection	IP 20
Capacity	2 Standard DIN module, DIN 43880
Approvals	UL, CSA
Type of remote signalling contact	changeover contact
Switching capacity (a.c.)	250 V / 0.5 A
Switching capacity (d.c.)	250 V / 0.1 A; 125 V / 0.2 A; 75 V / 0.5 A
Cross-sectional area for remote signalling terminals	max. 1.5 mm² solid / flexible

Masterdata	
Net weight	321.3 g/pc(s)
GTIN	4013364118577
PU	1 pc(s)
Customs tariff number (Comb. Nomenclature EU)	85363090

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.