


DB M 1 255 (961 120)

- Coordinated spark-gap-based lightning current arrester consisting of a base part and a plug-in protection module
- Maximum system availability due to RADAX Flow follow current limitation
- Directly coordinated with DEHNguard surge protective devices without additional cable length

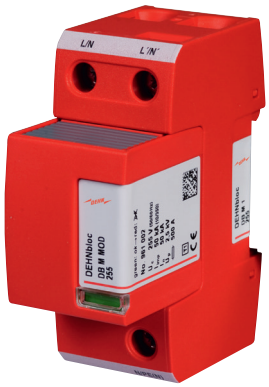



Basic circuit diagram

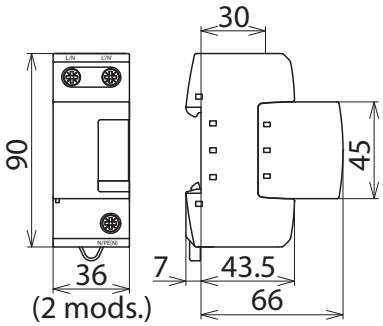

Dimension drawing

Coordinated and modular single-pole ightning current arrester with high follow current limitation.

Type	**DB M 1 255**
Part No.	**961 120**
Test values according to UL 1449	
SPD classification according to UL 1449	Component (Type 4) SPD for SPD Type 2 application
Rated A.C. Voltage	230 V
Frequency	60 Hz
Max. Continuous Operating Voltage (AC) [L-N] (MCOV)	255 V
Voltage Protection Rating [L-N] (VPR)	1500 V
Amperage (series connection)	115 A
Nominal discharge current (8/20µs) (I_n)	20 kA
Operating Temperature Range	-40°C...+85°C
Cross-sectional area (L/N, L'/N', N/PE(N))	AWG 8 Cu stranded
Torque (L/N, L'/N', N/PE(N))	65 □□□□□□
Technical data	
SPD according to EN 61643-11 / IEC 61643-11	type 1 / class I
Nominal voltage (a.c.) (U_N)	230 V (50 / 60 Hz)
Max. continuous operating voltage (AC) (U_C)	255 V (50 / 60 Hz)
Lightning impulse current (10/350 µs) (I_{imp})	50 kA
Specific energy (W/R)	625.00 kJ/ohms
Voltage protection level (U_p)	≤ 2.5 kV
Follow current extinguishing capability (a.c.) (I_{fi})	50 kA_{rms}
Follow current limitation / Selectivity	no tripping of a 32 A gG fuse up to 50 kA_{rms} (prosp.)
Response time (t_A)	≤ 100 ns
Max. backup fuse (L) up to I_K = 50 kA_{rms} (t_a ≤ 0.2 s)	500 A gG
Max. backup fuse (L) up to I_K = 50 kA_{eff} (t_a ≤ 5 s)	315 A gG
Max. backup fuse (L-L')	125 A gG
Temporary overvoltage (U_T) – characteristic	440 V / 120 min. – withstand
Operating temperature range (parallel connection) (T_{UP})	-40 °C ... +80 °C
Operating temperature range (through-wiring) (T_{US})	-40 °C ... +60 °C
Operating state / fault indication	green / red
Number of ports	1
Cross-sectional area (L/N, L'/N', N/PE(N)) (min.)	10 mm^2 solid / flexible
Cross-sectional area (L/N, N/PE(N)) (max.)	50 mm^2 stranded / 35 mm^2 flexible
Cross-sectional area (L'/N') (max.)	35 mm^2 stranded / 25 mm^2 flexible
For mounting on	35 mm DIN rails acc. to EN 60715
Enclosure material	thermoplastic, red, UL 94 V-0
Place of installation	indoor installation
Degree of protection	IP 20
Capacity	2 Standard DIN module, DIN 43880
Approvals	VDE, KEMA, UL

© DEHN, Inc. • 500 S Main Street, Suite 115 • Mooresville, NC 28115 • United States • Tel. +1 877-927-6510 • contactDEHN@dehn.us • www.dehn.us

: Tested • NEU: New • !: Discontinued Model
: Cross connector • : Longitudinal connector • : Parallel connector • : T connector • : Clamp for parallel connector • : Clamp for T connector
: Pipe clamp for parallel connector • : Pipe clamp for T connector • : Equipotential bonding bar • : Bridging component

Extended technical data	
Max. prospective short-circuit current	100 kA_{rms} (220 kA_{peak})
Limitation / Extinction of mains follow currents	up to 100 kA_{rms} (220 kA_{peak})
Max. backup fuse (L) up to I_K = 100 kA_{rms} ($t_a \leq 0.2$ s)	500 A gG
Max. backup fuse (L) up to I_K = 100 kA_{rms} ($t_a \leq 5$ s)	315 A gG
Supplementary data	
Nominal discharge current (8/20 µs) (I_n)	50 kA

Masterdata	
Net weight	339.8 g/pc(s)
GTIN	4013364118614
PU	1 pc(s)
Customs tariff number (Comb. Nomenclature EU)	85363090

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.

© DEHN, Inc. • 500 S Main Street, Suite 115 • Mooresville, NC 28115 • United States • Tel. +1 877-927-6510 • contactDEHN@dehn.us • www.dehn.us

: Tested • NEU: New • !: Discontinued Model
: Cross connector • : Longitudinal connector • : Parallel connector • : T connector • : Clamp for parallel connector • : Clamp for T connector
: Pipe clamp for parallel connector • : Pipe clamp for T connector • : Equipotential bonding bar • : Bridging component