

DVCI 1 255 FM (961 205)

- Spark-gap-based combined lightning current and surge arrester with integrated backup fuse capable of carrying lightning currents
- Maximum system availability due to RADAX Flow follow current limitation
- Capable of protecting terminal equipment





Basic circuit diagram

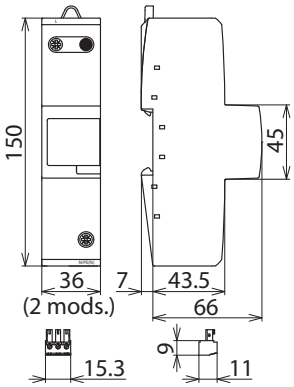

Dimension drawing

Combined lightning current and surge arrester with integrated lightning current carrying backup fuse.

Type	**DVCI 1 255 FM**
Part No.	**961 205**
SPD according to EN 61643-11 / IEC 61643-11	type 1 + type 2 / class I + class II
Nominal voltage (a.c.) (U_N)	230 V (50 / 60 Hz)
Max. continuous operating voltage (AC) (U_C)	255 V (50 / 60 Hz)
Lightning impulse current (10/350 µs) (I_{imp})	25 kA
Specific energy (W/R)	156.25 kJ/Ohm
Nominal discharge current (8/20 µs) (I_n)	25 kA
Voltage protection level (U_p)	≤ 1.5 kV
Follow current extinguishing capability (a.c.) (I_{fi})	50 kA_{rms}
Follow current limitation / Selectivity	no tripping of a 20 A gG fuse up to 50 kA_{rms} (prosp.)
Response time (t_A)	≤ 100 ns
Max. mains-side overcurrent protection	integrated backup fuse
Rated breaking capacity of the internal backup protection	100 kA
Temporary overvoltage (U_T) – characteristic	440 V / 120 min. – withstand
Operating temperature range (T_U)	-40 °C ... +80 °C
Operating state / fault indication	green / red
Number of ports	1
Cross-sectional area (L, N/PE(N)) (min.)	10 mm^2 solid / flexible
Cross-sectional area (L, N/PE(N)) (max.)	50 mm^2 stranded / 35 mm^2 flexible
For mounting on	35 mm DIN rails acc. to EN 60715
Enclosure material	Thermoplastic, red, UL 94 V-0
Place of installation	Indoor
Degree of protection	IP 20
Capacity	2 modules, DIN 43880 Standard DIN module, DIN 43880
Approvals	KEMA
Type of remote signalling contact	changeover contact
Switching capacity (a.c.)	250 V / 0.5 A
Switching capacity (d.c.)	250 V / 0.1 A; 125 V / 0.2 A; 75 V / 0.5 A
Cross-sectional area for remote signalling terminals	max. 1.5 mm^2 solid / flexible
When used in switchgear with prospective short-circuit currents exceeding 50 kA_{rms} (tested by VDE)	
Max. prospective short-circuit current	100 kA_{rms} (220 kA_{peak})
Limitation / Extinction of mains follow currents	up to 100 kA_{rms} (220 kA_{peak})
Voltage protection level [L-PE] (U_p) in 3+1 configuration with DGPM 1 255 (FM) (part no. 961 180 (961 185)) and MVS 1 4 8 TT (part no. 900 849)	≤ 2.5 kV

Masterdata	
Net weight	435 g/pc(s)
Customs tariff number (Comb. Nomenclature EU)	85363090
GTIN	4013364145115
PU	1 pc(s)

© DEHN, Inc. • 500 S Main Street, Suite 115 • Mooresville, NC 28115 • United States • Tel. +1 877-927-6510 • contactDEHN@dehn.us • www.dehn.us

: Tested • NEU: New • !: Discontinued Model
: Cross connector • : Longitudinal connector • : Parallel connector • : T connector • : Clamp for parallel connector • : Clamp for T connector
: Pipe clamp for parallel connector • : Pipe clamp for T connector • : Equipotential bonding bar • : Bridging component

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.