

DSE MOD 242 (971 003)

- Spark gap technology particularly suited for use in d.c. circuits
- Operating state / fault indication by green / red indicator flags in the inspection window
- Easy replacement of protection modules without tools due to module locking system with module release button





Basic circuit diagram

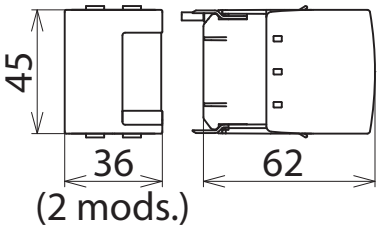

Dimension drawing

Spark-gap-based protection module

Type	**DSE MOD 242**
Part No.	**971 003**
Max. continuous operating voltage DC (U_c)	242 V
Lightning impulse current (10/350 µs) (I_{imp})	25 kA
Specific energy (W/R)	156.25 kJ/ohms

Masterdata	
Net weight	108.5 g/pc(s)
GTIN	4013364144491
PU	1 pc(s)
Customs tariff number (Comb. Nomenclature EU)	85363090

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.