

DSE MOD NG 2P 60 (971 004)

- Spark gap technology particularly suited for use in d.c. circuits
- Operating state / fault indication by green / red indicator flags in the inspection window
- Easy replacement of protection modules without tools due to module locking system with module release button





Basic circuit diagram

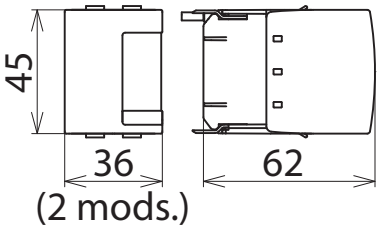

Dimension drawing

Spark-gap-based protection module

NEW

Type	DSE MOD NG 2P 60
Part No.	**971 004**
Max. continuous operating voltage DC (U_C)	60 V
Lightning impulse current (10/350 µs) (I_{imp})	25 kA
Specific energy (W/R)	156.25 kJ/ohms

Masterdata	
Net weight	201.51 g/pc(s)
GTIN	4013364489530
PU	1 pc(s)
Customs tariff number (Comb. Nomenclature EU)	85363090

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.

© DEHN, Inc. • 500 S Main Street, Suite 115 • Mooresville, NC 28115 • United States • Tel. +1 877-927-6510 • contactDEHN@dehn.us • www.dehn.us

: Tested • NEW: New • : Discontinued Model
: Cross connector • : Longitudinal connector • : Parallel connector • : T connector • : Clamp for parallel connector • : Clamp for T connector
: Pipe clamp for parallel connector • : Pipe clamp for T connector • : Equipotential bonding bar • : Bridging component