
Earthing and short-circuiting device TI, spring-loaded earth clamp

EKV3 NH00 TI V1RC3P2 (V1RC3P2)

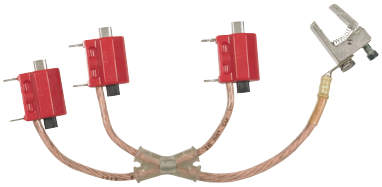

Clamping range up to 24 mm and fixing via adjustable handle DGF EKV VI.
Earthing cartridges of size 00 fixed on the phase cable end.
For service entrance boxes.

Type	**EKV3 NH00 TI V1RC3P2**
Part No.	**V1RC3P2**
Version	Three-pole
Cable cross-section (phase side)	16 mm²
Cable cross-section (earth side)	16 mm²
Cable cross-section Cu	16/16 mm²
Length of phase cable A	140 mm
Length of phase cable B	140 mm
Length of phase cable C	140 mm
Length of earthing cable	250 mm
Fully insulated	No
Max. short-circuit current I_k 0.5 s	4.5 kA
Max. short-circuit current I_k 1 s	3.2 kA
Material (clamp body)	**Copper alloy / gal Sn**
Material (sheaths)	**Macrolon**
Temperature range	–25 °C … +55 °C

Masterdata	
Net weight	1 pc(s)/st
Customs tariff number (Comb. Nomenclature EU)	85359000
GTIN	4013364163737
PU	1 st

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.

Note: When ordering, please specify a clear Variant No.