
EKV3+1 70 R V4RJ7A2 (V4RJ7A2)

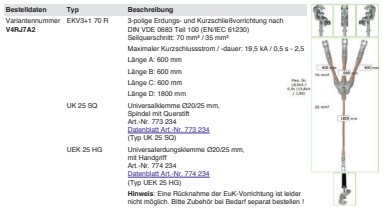

Bestelldaten	Typ	Beschreibung
Variantennummer **V4RJ7A2**	EKV3+1 70 R	3-polige Erdungs- und Kurzschließvorrichtung nach DIN VDE 0683 Teil 100 (EN/IEC 61230) Seilquerschnitt: 70 mm² / 35 mm² Maximaler Kurzschlussstrom / -dauer: 19,5 kA / 0,5 s - 2,5 Länge A: 600 mm Länge B: 600 mm Länge C: 600 mm Länge D: 1800 mm
	UK 25 SQ	Universalklemme Ø20/25 mm, Spindel mit Querstift Art.-Nr. 773 234 Datenblatt Art.-Nr. 773 234 (Typ UK 25 SQ)
	UEK 25 HG	Universalerdungsklemme Ø20/25 mm, mit Handgriff Art.-Nr. 774 234 Datenblatt Art.-Nr. 774 234 (Typ UEK 25 HG)
		Hinweis: Eine Rücknahme der EuK-Vorrichtung ist leider nicht möglich. Bitte Zubehör bei Bedarf separat bestellen !

Type	**EKV3+1 70 R V4RJ7A2**
Part No.	**V4RJ7A2**
Phase cable end	UK 25 SQ
Earth cable end	UEK 25 HG
For fixed ball point Ø	20 / 25 mm
For T pins with a collar width of	15 mm
Rd / Fl clamping range	20 mm
Cable cross-section Cu	70/35 mm²
Max. short-circuit current I_k 0.5 s	19.5 kA
Max. short-circuit current I_k 1 s	13.8 kA
Standard	EN/IEC 61138 (DIN VDE 0283-3) and EN/IEC 61230 (DIN VDE 0683-100)
Temperature range	–25 °C ... +55 °C
Material (cable)	**E-Cu, extra finely stranded and highly flexible**
Material (sheath)	**Thermoplastic (soft PVC compound YM2)**

Masterdata	
Net weight	5.76 kg/pc(s)
GTIN	4013364165526
PU	1 pc(s)
Customs tariff number (Comb. Nomenclature EU)	85359000

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.

© DEHN, Inc. • 500 S Main Street, Suite 115 • Mooresville, NC 28115 • United States • Tel. +1 877-927-6510 • contactDEHN@dehn.us • www.dehn.us

: Tested • NEU: New • !: Discontinued Model
: Cross connector • : Longitudinal connector • : Parallel connector • : T connector • : Clamp for parallel connector • : Clamp for T connector
: Pipe clamp for parallel connector • : Pipe clamp for T connector • : Equipotential bonding bar • : Bridging component