
# Earthing and Short-Circuiting Devices for Crane Conductor Bars

## EKV3 35BS ZK VN63A91 (VN63A91)

- Other cable lengths can be selected online via the earthing and short-circuiting configurator

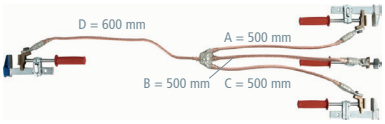


| Type | EKV3 35BS ZK VN63A91 |
|---|---|
| **Part No.** | **VN63A91** |
| Clamping range | 85 mm |
| Version | Three-pole |
| Cable cross-section (phase side) | 35 mm² |
| Cable cross-section (earth side) | 35 mm² |
| Length of phase cable A | 500 mm |
| Length of phase cable B | 500 mm |
| Length of phase cable C | 500 mm |
| Length of earthing cable | 600 mm |
| Fully insulated | No |
| Max. short-circuit current $I_k$ 0.5 s | 10.0 kA |
| Max. short-circuit current $I_k$ 1 s | 6.9 kA |
| Material (clamp body) | **MCI/gal Zn** |
| Material (pressure plates) | **Cu alloy** |
| Material (short-circuiting cables) | **Cu, highly flexible** |
| Standard | EN/IEC 61230 (DIN VDE 0683-100) |
| Temperature range | –25 °C ... +55 °C |

| Masterdata | |
|---|---|
| Net weight | 5.4 kg/pc(s) |
| Customs tariff number (Comb. Nomenclature EU) | 85359000 |
| GTIN | 4013364163812 |
| PU | 1 pc(s) |

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.

Note: When ordering, please specify a clear Variant No.

The clamp for the PEN conductor is marked in blue.