
EKV3+1 70 R VQYP8B2 (VQYP8B2)

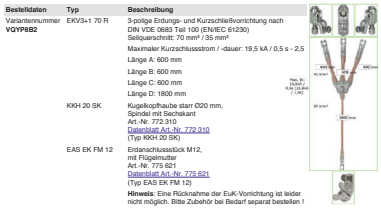

Bestelldaten	Typ	Beschreibung
Variantennummer **VQYP8B2**	EKV3+1 70 R	3-polige Erdungs- und Kurzschließvorrichtung nach DIN VDE 0683 Teil 100 (EN/IEC 61230) Seilquerschnitt: 70 mm² / 35 mm² Maximaler Kurzschlussstrom / -dauer: 19,5 kA / 0,5 s - 2,5 Länge A: 600 mm Länge B: 600 mm Länge C: 600 mm Länge D: 1800 mm
	KKH 20 SK	Kugelkopfhaube starr Ø20 mm, Spindel mit Sechskant Art.-Nr. 772 310 Datenblatt Art.-Nr. 772 310 (Typ KKH 20 SK)
	EAS EK FM 12	Erdanschlussstück M12, mit Flügelmutter Art.-Nr. 775 621 Datenblatt Art.-Nr. 775 621 (Typ EAS EK FM 12)
		Hinweis: Eine Rücknahme der EuK-Vorrichtung ist leider nicht möglich. Bitte Zubehör bei Bedarf separat bestellen !

Type	**EKV3+1 70 R VQYP8B2**
Part No.	**VQYP8B2**
Phase cable end	KKH 20 SK
Earth cable end	EAS EK FM 12
For fixed ball point Ø	20 mm
Cable cross-section Cu	70/35 mm²
Max. short-circuit current I_k 0.5 s	19.5 kA
Max. short-circuit current I_k 1 s	13.8 kA
Standard	EN/IEC 61138 (DIN VDE 0283-3) and EN/IEC 61230 (DIN VDE 0683-100)
Temperature range	–25 °C … +55 °C
Material (cable)	**E-Cu, extra finely stranded and highly flexible**
Material (sheath)	**Thermoplastic (soft PVC compound YM2)**

Masterdata	
Net weight	7.15 kg/pc(s)
GTIN	4013364163195
PU	1 pc(s)
Customs tariff number (Comb. Nomenclature EU)	85359000

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.

© DEHN, Inc. • 500 S Main Street, Suite 115 • Mooresville, NC 28115 • United States • Tel. +1 877-927-6510 • contactDEHN@dehn.us • www.dehn.us

: Tested • NEU: New • !: Discontinued Model
: Cross connector • : Longitudinal connector • : Parallel connector • : T connector • : Clamp for parallel connector • : Clamp for T connector
: Pipe clamp for parallel connector • : Pipe clamp for T connector • : Equipotential bonding bar • : Bridging component