
Earthing and short-circuiting device TI, spring-loaded earth clamp

EKV3 16TI EK VSB29AH (VSB29AH)

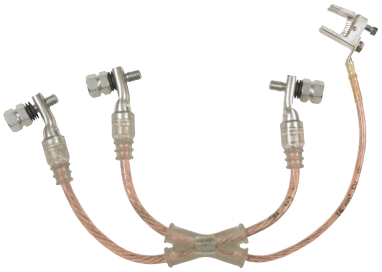

Clamping range up to 24 mm and fixing via adjustable handle DGF EKV VI.
Screw-on cable lugs with M10 hexagon pin on the phase cable end.
To be screwed onto earthing cartridges with M10 connection of service entrance boxes.

Type	**EKV3 16TI EK VSB29AH**
Part No.	**VSB29AH**
Version	Three-pole
Cable cross-section (phase side)	16 mm²
Cable cross-section (earth side)	16 mm²
Cable cross-section Cu	16/16 mm²
Length of phase cable A	190 mm
Length of phase cable B	140 mm
Length of phase cable C	140 mm
Length of earthing cable	280 mm
Fully insulated	No
Max. short-circuit current I_k 0.5 s	4.5 kA
Max. short-circuit current I_k 1 s	3.2 kA
Connection at the phase conductor	M10 bolts
Material (bolts)	**Copper alloy / gal Sn**
Temperature range	–25 °C ... +55 °C

Masterdata	
Net weight	1 pc(s)/st
Customs tariff number (Comb. Nomenclature EU)	85359000
GTIN	4013364162662
PU	1 st

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.

Note: When ordering, please specify a clear Variant No.