
Earthing and short-circuiting device VI, spring-loaded earth clamp

EKV3 16VI EK VZPW9LG (VZPW9LG)

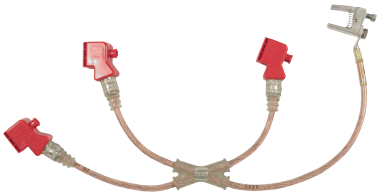

Clamping range up to 24 mm, attachment via adjustable handle DGF EKV VI.
For service entrance boxes.

Type	**EKV3 16VI EK VZPW9LG**
Part No.	**VZPW9LG**
Version	Three-pole
Cable cross-section (phase side)	16 mm²
Cable cross-section (earth side)	16 mm²
Cable cross-section Cu	16/16 mm²
Length of phase cable A	140 mm
Length of phase cable B	140 mm
Length of phase cable C	170 mm
Length of earthing cable	275 mm
Fully insulated	yes
Max. short-circuit current I_k 0.5 s	4.5 kA
Max. short-circuit current I_k 1 s	3.2 kA
Material (clamp body)	**Copper alloy/gal Sn**
Material (sheaths)	**Macrolon**
Temperature range	–25 °C ... +55 °C

Masterdata	
Net weight	1 pc(s)/st
Customs tariff number (Comb. Nomenclature EU)	85359000
GTIN	4013364163751
PU	1 st

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.

Note: When ordering, please specify a clear Variant No.