OCPP to Modbus TCP & RTU Server Gateway

Item number: INMBSOCP0200100

Configure this gateway as a Modbus RTU/TCP - OCPP protocol translator or move a step further with its OCPP Central System mode, which allows the gateway and the BMS to substitute the Central System of the OCPP installation and get all the potential of the Modbus-based BMS.



OCPP to Modbus TCP & RTU - Up to 20 chargers

Features and benefits

- **Up to six concurrent Modbus TCP clients supported**
  The gateway supports up to six simultaneous Modbus TCP clients.
- **Commissioning-friendly approach with Intesis MAPS**
  Templates can be imported and reused as often as needed, significantly reducing commissioning time.
- **OCPP scan function: search chargers in the network**
  A scan function is available to search for chargers in the OCPP network.
- **BMS CS mode supports multiple OCPP operations**
  Authorize, Start/StopTransaction, Reservation, Local list management, and more operations supported.
- **Support for both Modbus RTU and Modbus TCP**
  The gateway supports both Modbus RTU and Modbus TCP protocols.
- **Support for OCPP 1.6 JSON**
  The gateway supports the OCPP 1.6 JSON notation format.
- **Fix Modbus register map**
  Fixed Modbus register map. The register number identifies the element.
- **OCPP Central System mode**
  The OCPP readings supported in OCPP Central System mode are Charger info, availability, and MeterValues.

OCPP to Modbus TCP & RTU Server Gateway



General

Capacity	Up to 20 chargers
Net Width (mm)	53
Net Height (mm)	93
Net Depth (mm)	58
Net Weight (g)	120
Packed Width (mm)	135
Packed Height (mm)	85
Packed Depth (mm)	100
Packed Weight (g)	140
Operating Temperature °C Min	0º
Operating Temperature °C Max	60º
Storage Temperature °C Min	-30
Storage Temperature °C Max	60
Input Voltage (V)	9-36 VDC / 24 VAC / 50-60 Hz / 0.140 A / 1.7 W
Power Connector	3-pole
Configuration	Intesis MAPS
Installation Conditions	This gateway is designed to be mounted inside an enclosure. If the unit is mounted outside an enclosure, precautions should always be taken to prevent electrostatic discharge to the unit. When working inside an enclosure (e.g., making adjustments, setting switches, etc.), typical anti-static precautions should always be followed before touching the unit.
Content of Delivery	Intesis gateway and installation manual.
Mounting	DIN rail mount (bracket included)

OCPP to Modbus TCP & RTU Server Gateway



General

Housing Materials	Plastic
Warranty (years)	3 years
Packaging Material	Cardboard

Identification and Status

Product ID	INMBSOCP0200100
Country of Origin	Spain
HS Code	8517620000
Dual Usage	No
Export Control Classification Number (ECCN) (Applies only to the U.S)	EAR99


Physical Features

Connectors / Input / Output	Power supply, EIA-485, Ethernet.
LED Indicators	Gateway and communication status.
DIP & Rotary Switches	EIA-485 serial port configuration.
Contains Battery	No


Certifications and Standards

Product Certifications	CE, CB, UKPSTI, UL, KC
WEEE Category	IT and telecommunications equipment

Use Case

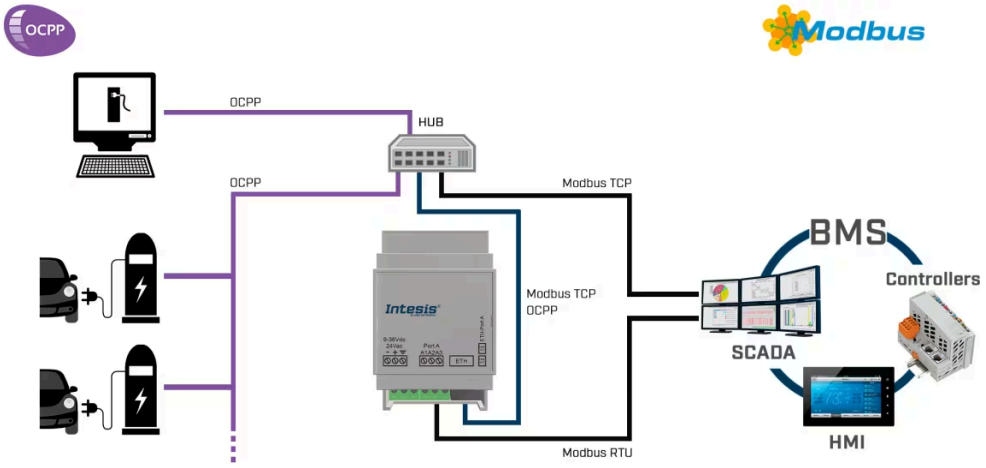

Integration example.

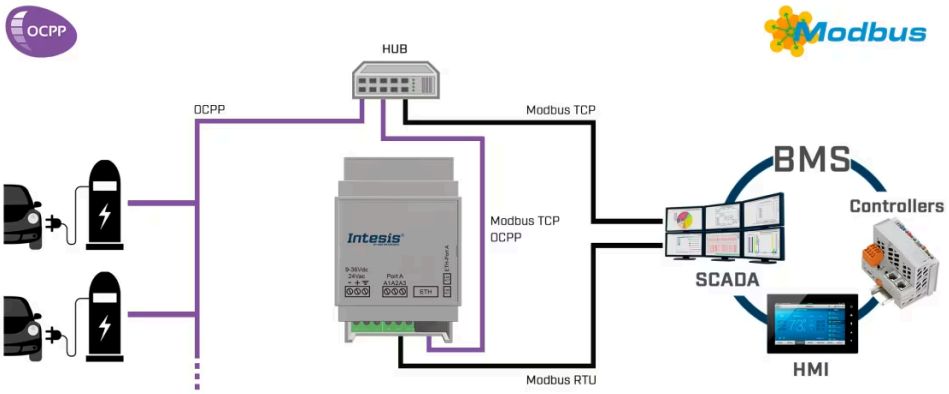

Integration example.