
finder
RELAYING INNOVATION

36
SERIES

Miniature PCB relays
10 A

- Burners, boilers and furnaces
- Jacuzzis and hot tubs
- Washing machines
- Hi-Fi systems
- Refrigerators
- Automation for blinds, grilles and shutters
- Electronic circuit boards
- Electronic kits

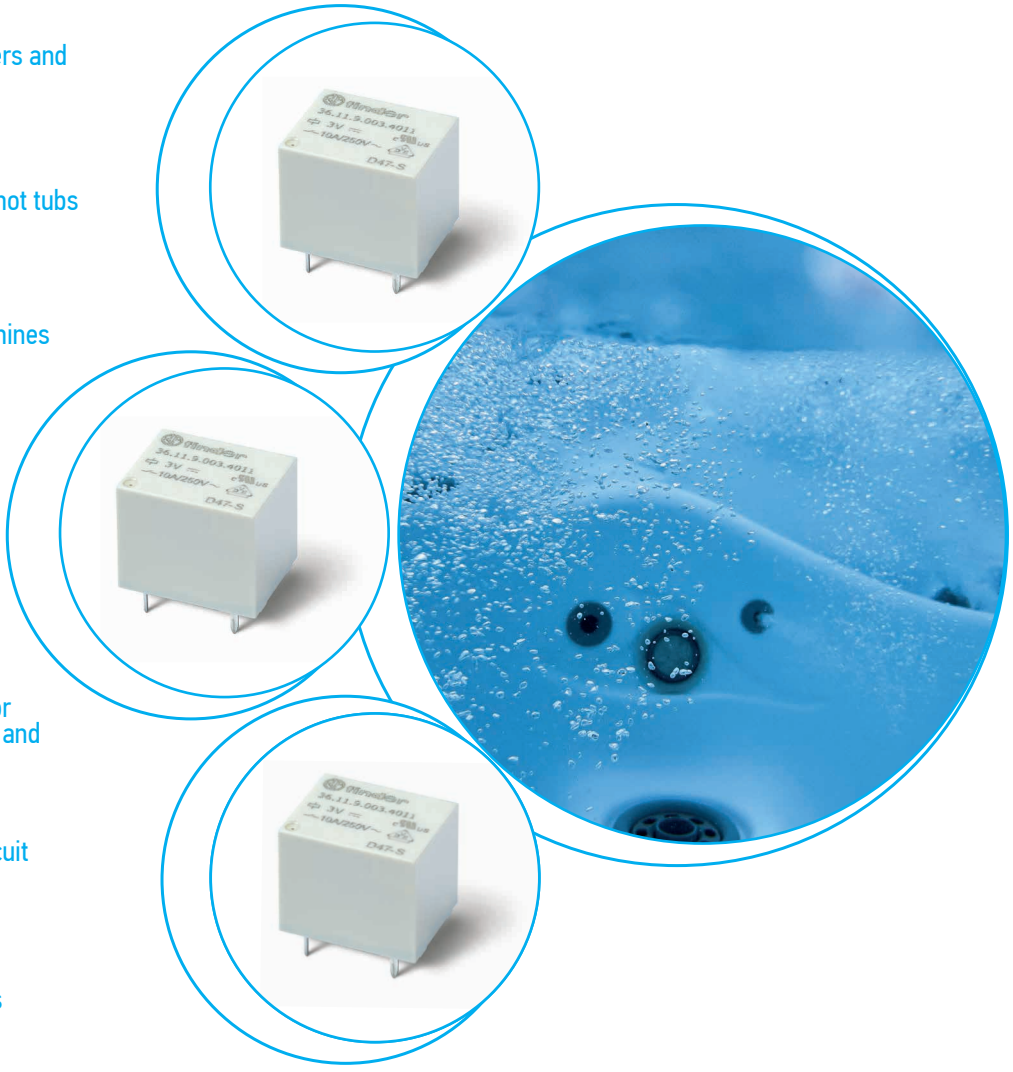

Finder reserves the right to make changes to its products and their technical specifications at any time and without prior notice, as part of its policy of continuous improvement.
The information contained in this document is provided for indicative purposes only and does not constitute a contractual obligation; errors and omissions excepted.
In the event of any discrepancy between the printed and online versions, the latter, available at findernet.com, shall prevail.


Printed circuit mount 10 A relay


- New smaller size
- 1 Pole changeover contacts
- Miniature - "Sugar cube" package
- DC coil - 360 mW
- Wash tight: RT III
- Cadmium Free contact material
- RoHS conform

36.11-4011



- 1 CO (SPDT), 10 A
- Sugar cube size
- PCB mount





For outline drawing see page 5

Copper side view

Contact specification		
Contact configuration		1 CO (SPDT)
Rated current/Maximum peak current	A	10/15 (NO) - 5/10 (NC)
Rated voltage/ Maximum switching voltage	V AC	250/277
Rated load AC1	VA	2500 (NO) - 1250 (NC)
Rated load AC15 (230 V AC)	VA	500 (NO)
Single phase motor rating (230 V AC)	kW	0.37 (NO)
Breaking capacity DC1: 28 V	A	10 (NO)
Minimum switching load	mW (V/mA)	500 (5/100)
Standard contact material		$AgSnO_2$
Coil specification		
Nominal voltage (U_N)	V AC (50/60 Hz)	—
	V DC	3 - 5 - 6 - 9 - 12 - 18 - 24 - 48
Rated power AC/DC	VA (50 Hz)/W	—/0.36
Operating range	AC	—
	DC	(0.75…1.3)U_N
Holding voltage	AC/DC	—/0.5 U_N
Must drop-out voltage	AC/DC	—/0.1 U_N
Technical data		
Mechanical life AC/DC	cycles	—/$10 \cdot 10^6$
Electrical life at rated load AC1	cycles	$50 \cdot 10^3$
Operate/release time	ms	10/5
Insulation between coil and contacts (1.2/50 µs)	kV	4
Dielectric strength between open contacts	V AC	750
Ambient temperature range	°C	–40…+85
Environmental protection		RT III
Approvals (according to type)		EAC cULus VDE

Ordering information

A

Example: 36 series miniature PCB relay, 1 CO (SPDT) - 10 A contacts, 12 V DC coil.

36	.	1	1	.	9	.	0	1	2	.	A: 4	B: 0	C: 1	D: 1

Series

Type
1 = PCB mount

No. of poles
1 = 1 pole, 10 A

Coil version
9 = DC

Coil voltage
See coil specifications

A: Contact material
4 = $AgSnO_2$

B: Contact circuit
0 = CO (SPDT)

C: Options
1 = None

D: Special versions
1 = Wash tight (RT III)

Selecting features and options: only combinations in the same row are possible.
Preferred selections for best availability are shown in **bold**.


Type	Coil version	A	B	C	D
36.11	DC	**4**	**0**	**1**	**1**

Technical data

Insulation according to EN 61810-1			
Nominal voltage of supply system		V AC	230/400
Rated insulation voltage		V AC	250
Pollution degree			2
Insulation between coil and contact set			
Type of insulation			Basic
Overvoltage category			II
Rated impulse voltage		kV (1.2/50 µs)	4
Dielectric strength		V AC	2500
Insulation between open contacts			
Type of disconnection			Micro-disconnection
Dielectric strength		V AC/kV (1.2/50 µs)	750/1.5
Insulation between coil terminals			
Rated impulse voltage (according to EN 61180)		kV (1.2/50 µs)	2
Other data			
Shock resistance		g	10
Bounce time: NO/NC		ms	1/6
Vibration resistance (5…55 Hz): NO/NC		g	14/8
Power lost to the environment			
	without contact current	W	0.4
	with rated current	W	1.4
Recommended distance between relays mounted on PCB		mm	≥ 5

Contact specification

F 36 - Electrical life (AC) v contact current

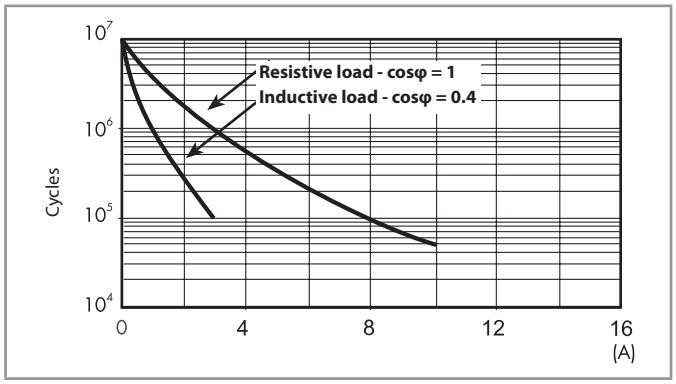


Coil specifications

DC coil data

Nominal voltage U_N	Coil code	Operating range U_{min}	Operating range U_{max}	Resistance R	Rated coil consumption I at U_N
V		V	V	Ω	mA
3	**9**.003	2.2	3.9	25	120
5	**9**.005	3.7	6.5	70	72
6	**9**.006	4.5	7.8	100	60
9	**9**.009	6.7	11.7	225	40
12	**9**.012	9	15.6	400	30
18	**9**.018	13.5	23.4	900	20
24	**9**.024	18	31.2	1600	15
48	**9**.048	36	62.4	6400	7.5

R 36 - DC coil operating range v ambient temperature

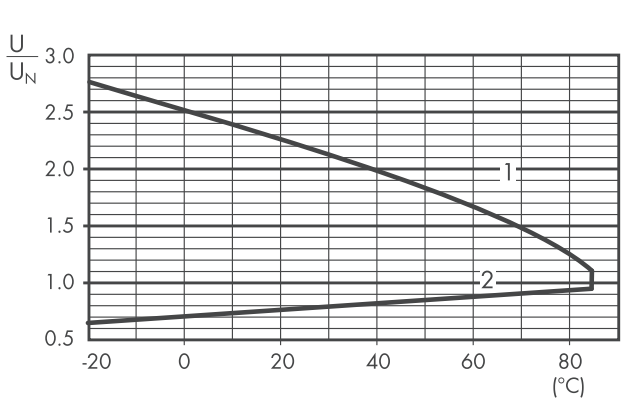

1 - Max. permitted coil voltage.
2 - Min. pick-up voltage with coil at ambient temperature.

Outline drawing

Type 36.11-4011

