
finder
RELAYING INNOVATION

REPORT

50 Series
48 Series
7S Series





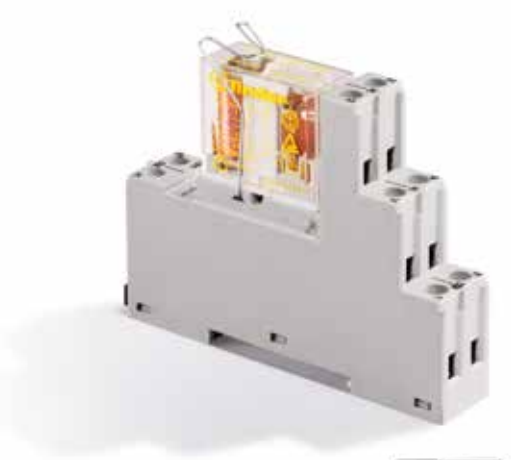





Relays with forcibly guided contacts for safety applications

50 Series - PCB Relay 8 A
48 Series - Relay Interface Modules 8 A
7S Series - Modular relays 6 - 10 A

For all applications requiring the expansion of safety contacts.

- According to: - EN 61810-3 class A and class B (previously EN 50205)
  - EN 13849-1
  - IEC 61508 up to SIL 2 and SIL 3 (according to type)
- Applications: - Elevator industry
  - Railway applications
  - Signalling
  - For safety applications according to the Machinery Directive
  - For electrical isolation
  - Chemical and petrochemical plants

findernet.com

50 - 48 - 7S SERIES
Relays with forcibly guided contacts for safey applications

Benefits

- ✓ Forcibly guided contacts ensure reliability
- ✓ Versatile products adaptable to different applications
- ✓ These are products that will help you meet your equipment's compliance with its relevant Directives

50 Series



PCB Relay
according to EN 61810-3 class B* (previously EN 50205)
- 2 CO 8 A
- Nominal coil voltage from 5 to 125 V DC
- Cadmium Free contact materials
- 8 mm, 6 kV (1.2/50 µs) isolation, coil-contacts
- Available with AgNi or AgNi+Au contacts
- Flux proof: RT II

48 Series



Relay Interface Modules
according to EN 61810-3 class B* (previously EN 50205)
- 2 CO 8 A
- Nominal coil voltage 12 and 24 V DC
- Screw terminals
- Cadmium Free contact materials
- 8 mm, 6 kV (1.2/50 µs) isolation, coil-contacts
- Available with AgNi or AgNi+Au contacts
- 35 mm rail (EN 60715) mounting

7S Series



Modular relays
according to EN 61810-3 class A (previously EN 50205)
- Nominal coil voltage: 12 - 24 - 48 and 110 V DC
  110…125 and 230…240 V AC
- Screw and Screwless terminals
- LED indication of coil status

For applications up to SIL2 according to IEC 61508 (according to type)
- 2, 3, 4, 5 or 6 forcibly contacts 6 A and 10 A (according to type)
- For functional reliability in machinery and plant engineering according to EN 13849-1
- For railway applications; materials compliant with fire and smoke characteristics (EN 45545-2:2020); mechanical and climatic characteristics compliant with EN 61373 and EN 50155
- 24 and 110 V DC versions with extended operating range (0.7…1.25)U_N



For applications up to SIL3 according to IEC 61508
- 2 NO safety contacts 6 A
- 1 NC feedback contact
- 1 auxiliary signalling contact
- For functional reliability in machinery and plant engineering according to EN 13849-1

*** Class B: only 1 NO and 1 NC shall be used as forcibly guided contacts.**

Prices, features, specifications, capabilities, appearance and availability of our products and services are subject to change without notice.
FINDER assumes no responsibility for the presence of possible errors or insufficient information in this document. In case of discrepancies between the printed and online versions, the latter prevails.