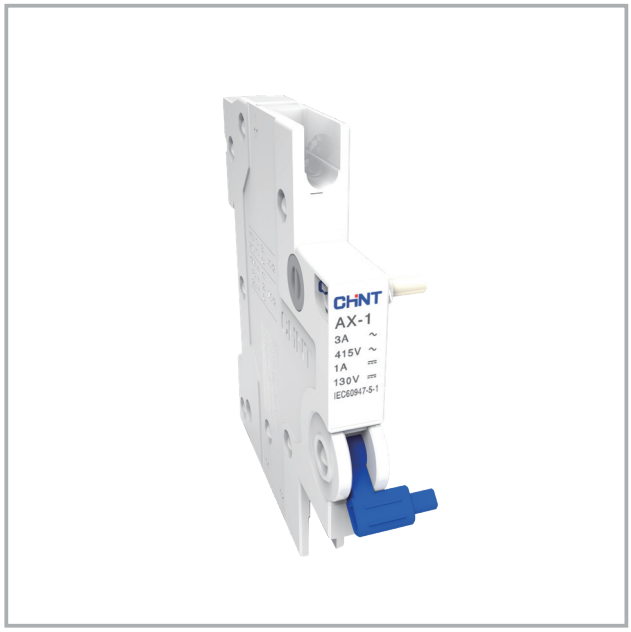


AX-1
Auxiliary Contact

1. General

1.1 Indication of the position of the device's contacts.


1.2 To be mounted on the left side of the MCBs/RCBOs thanks to the special pin.


CE RoHS

2.Technical data

	Standard		IEC/EN 60947-5-1		
Electrical features	Rated voltage Us	V	AC-12	AC 415	3
				AC 240	6
			DC-12	DC 130	1
				DC 48	2
				DC 24	6
	Configurations		1N/O+1N/C		
	Rated impulse withstand voltage (1.2/50)Uimp	V	4,000		
	Dielectric TEST voltage at ind. Freq. for 1min	kV	2		
	Insulation voltage Ui	V	500		
	Pollution degree		2		
Mechanical features	Electrical life		6,050		
	Mechanical life		10,000		
	Protection degree		IP20		
	Ambient temperature (with daily average≤35℃)	℃	-5...+40		
	Storage temperature	℃	-25...+70		
Installation	Terminal connection type		Cable		
	Terminal size top/bottom for cable	mm^2	2.5		
		AWG	18-14		
	Tightening torque	N·m	0.8		
		In-lbs.	7		

3. Overall and mounting dimensions (mm)

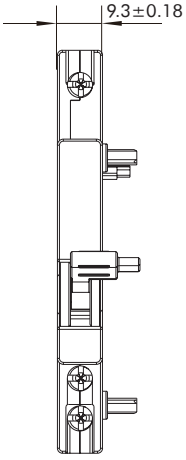

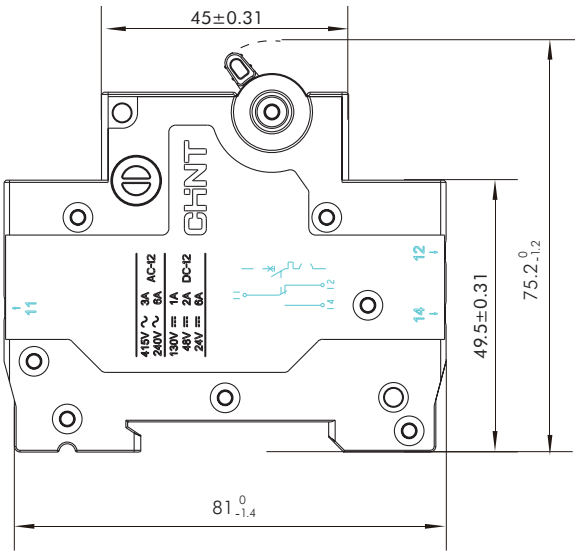

Accessories for NB1, NBH8, NB1L, NBH8LE, NB310L, NB4LE, NB8-40J, NB8-63, NB8LE-63M

Function	Description(EN)	Code
Auxiliary contacts	XF9	184994
Alarm auxiliary contacts	XF9J	184996
Shunt release AC/DC12V	S9 AC/DC12V	184963
Shunt release AC/DC24V	S9 AC/DC24V	184985
Shunt release AC/DC48V	S9 AC/DC48V	184984
Shunt release AC230/400V	S9 AC230/400V	184986
Under voltage release AC230V	V9 AC230V	184974
Over/under voltage release	OUVT-1	269898

Accessories for DZ158, DZ158LE

Function	Description(EN)	Code
Auxiliary contacts (new structure)	AX-1 G	543913
Mechanical Interlock	LMI-12	391932

Accessories for NL1, NL210

Function	Description(EN)	Code
Auxiliary contacts	AX-5	200998