
Datasheet: Protective clothing ArcFit Indoor

APT ID 98 (787 672)

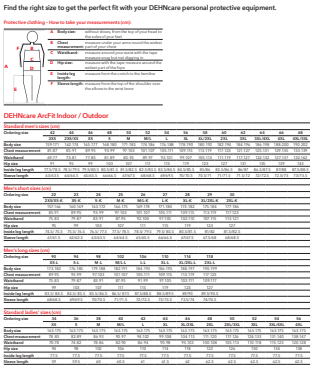


Find the right size to get the perfect fit with your DEHNcare personal protective equipment.

Protective clothing - How to take your measurements (cm):

A Body size: without shoes, from the top of your head to the soles of your feet

B Chest measurement: in a relaxed position your arms moved the widest part of your chest

C Waist/hip and: measure around your waist with the tape measure snug but not pressing in

D Hip size: measure around the widest part of your hips

E Inside leg length: measure from the crotch to the hem/the soles of your feet

F Sleeve length: measure from the top of the shoulder over the elbow to the wrist bone

DEHNcare ArcFit Indoor / Outdoor

Dimension drawing

Type	APT ID 98
Part No.	**787 672**
Arc fault protection class (box test 7 kA / 0.5 s – single-pole)	APC 2
Arc energy (W_{arc} oder W_{LBP})	320 kJ
Material	**Cotton (52%), modacrylic (22%), viscose (19%), para-aramid (6%), static inhibitors (1%)**
Arc rating – ATPV (open arc)	18 cal / cm² *)
Arc rating – ELIM (open arc)	13 cal / cm²
PPE category (NFPA 70E)	PPE 2
Weight per unit area	450 g/m²
Material (sewing thread)	**Kevlar (100%)**
Standard	IEC 61482-2, EN ISO 11612, EN 1149-5, EN ISO 13688, EN ISO 11611, EN 17353
Primary colour	grey
Secondary colour	black
Zipper	red
Size (international)	98 (M-L)

Masterdata	
Net weight	1080 g/pc(s)
GTIN	4013364490628
PU	1 pc(s)
Customs tariff number (Comb. Nomenclature EU)	62034211

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.

*) Outer fabric after preparation

© DEHN, Inc. • 500 S Main Street, Suite 115 • Mooresville, NC 28115 • United States • Tel. +1 877-927-6510 • contactDEHN@dehn.us • www.dehn.us

: Tested • NEU: New • !: Discontinued Model
: Cross connector • : Longitudinal connector • : Parallel connector • : T connector • : Clamp for parallel connector • : Clamp for T connector
: Pipe clamp for parallel connector • : Pipe clamp for T connector • : Equipotential bonding bar • : Bridging component