FILTER FAN PLUS - SIZE 5 (291 X 291 MM)

FPI 018 | 01874.0-30



Filter fan FPI size 5 (291 x 291 mm) for air conditioning enclosures and casings. Configuration: FPI - airflow direction "in" (standard version: blowing). Optimum air conditioning for your enclosure: The Filter Fan Plus blows cooler outside air into the enclosure. The warmer air inside the enclosure is discharged via the exit filter. The resulting air flow cools the enclosure and protects the components from overheating.

- Only one filter mat required (on the filter fan)
- Easy installation thanks to mounting frame with twist locks
- Effective air circulation
- Accessories: Hose-proof hood to increase the protection type to IP56

OVERVIEW TECHNICAL DATA

Device type	Filter fan Plus (AC)
Protection class	I
Protection type	IP54
Material hood	Plastic to UL94 V-0, light grey
Filter material	Plastic fibre with progressive structure
Filter mat	G3
Casing	Plastic to UL94 V-0, light grey
AC/DC	AC
Operating voltage	230 V
Frequency	50 Hz
Power consumption	95 W
Axial fan	Aluminium fan body, rotor metal
Cooling airflow rate outlet filter	373 m³/h
Cooling airflow rate blowing	433 m³/h
Average emission sound pressure level	62 dB(A)
Service life	>76000 h
Operating temperature	-25 °C - 55 °C
Operating humidity	≤90 % RH
Storage humidity	≤90 % RH
Storage temperature	-40 °C - 70 °C
Torque	0,8 Nm max.
Connection	3-pole clamp 2.5 mm²
Mounting frame	With 4 built-in rotary latches for locking
Height	322 mm
Width	322 mm

Depth	189 mm
Installation depth	160 mm
Weight	3100 g
Mounting cut-out	291 x 291 mm
Item number accessories 1	08637.0-00
Item number accessories 2	11874.0-00
Item number accessories 3	08674.0-00
Accessory 1	Replacement filter mat FM 086
Accessory 2	FPI 118 exit filter with air-flap outlet technology
Accessory 3	Water jet protection bonnet FFH 086
Note	Other voltages on request;Drilling pattern for screw fixing marked on mounting frame.
Protection type UL	NEMA Type 12

EXIT FILTER - SIZE 5 (291 X 291 MM)

Article number	Filter mat	Height	Width	Depth	Installation depth	Weight
11874.0-00	ISO coarse 55 % according to ISO 16890 (G3), grav. Initial gravimetric arrestance 57 %	322 mm	322 mm	79 mm	25 mm	800 g


FILTER MAT BAG


Article number	packaging_size	Filter mat	Mounting cut-out
08637.0-00	5 Piece	ISO coarse 55 % according to ISO 16890 (G3), grav. Initial gravimetric arrestance 57 %	283x283 mm


HOSE-PROOF HOOD

Article number	material_sealing	cutout_dimension	Height	Width	Depth	Weight
08674.0-00	Silicone, food safe	FPI/FPO 018 291 x 291 mm	485 mm	409 mm	103 mm	3700 g

TECHNICAL DRAWINGS

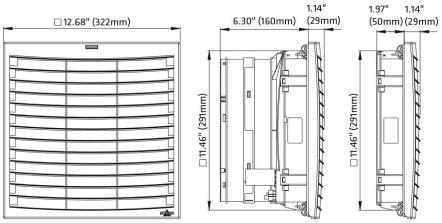





Enclosure cut-out