
KP AQ4 50 DUL 8.10 VKL11 FRSM10 V2A (540 263)



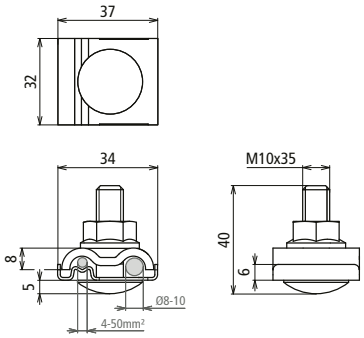

Dimension drawing

UNI earth clamp for incorporating parts of an installation in the functional equipotential bonding, lightning equipotential bonding or in the functional earthing. Contact plate with double clamp. StSt type, with M10 screw and self-locking nut with serrated bearing.

The StSt contact plate (intermediate element) allows different conductor materials (Cu, Al, St/tZn and StSt) to be connected to the normal mounting systems, e.g. to aluminium, without the risk of contact corrosion.
The double clamp design allows easy and quick interconnection of the profiles, e.g. by feed-through wiring.

Type	**KP AQ4 50 DUL 8.10 VKL11 FRSM10 V2A**
Part No.	**540 263**
Material of clamp	StSt
Clamping range Rd	8-10 mm
Connection (solid / stranded)	4-50 mm²
Screw	M10 x 35 mm
Material of screw / nut	StSt

Masterdata	
Net weight	77.26 g/pc(s)
GTIN	4013364449244
PU	1 pc(s)
Customs tariff number (Comb. Nomenclature EU)	85359000

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.

© DEHN, Inc. • 500 S Main Street, Suite 115 • Mooresville, NC 28115 • United States • Tel. +1 877-927-6510 • contactDEHN@dehn.us • www.dehn.us

: Tested • NEU: New • !: Discontinued Model
: Cross connector • : Longitudinal connector • : Parallel connector • : T connector • : Clamp for parallel connector • : Clamp for T connector
: Pipe clamp for parallel connector • : Pipe clamp for T connector • : Equipotential bonding bar • : Bridging component