
EAPA 3 KFP 25 KKH (728 625)



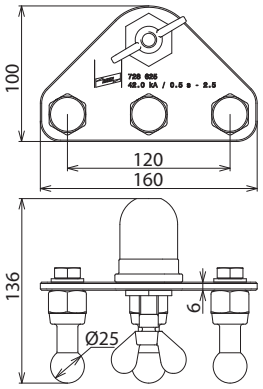

Dimension drawing

Type	EAPA 3 KFP 25 KKH
Part No.	**728 625**
Fixed point Ø	25 mm
Material of plate	**Aluminium**
Max. cable cross-section Cu	150 mm²
Terminal lug material	4 mm: **Cu/gal Sn**; 6 mm: **HDG steel**
Material (fixed point)	**E-Cu/gal Sn**
Max. short-circuit current I_k 0.5 s	42.0 kA
Max. short-circuit current I_k 1 s	29.6 kA
Standard	EN/IEC 61230 (DIN VDE 0683-100) and fixed points in accordance with DIN 48088-1
Material (threaded pin)	**StSt A2-70**
Hexagon nut	DIN 985-M12-8/gal Zn; DIN 985-M16-8/gal Zn

Masterdata	
Net weight	984 g/pc(s)
GTIN	4013364147867
PU	1 pc(s)
Customs tariff number (Comb. Nomenclature EU)	85359000

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.

© DEHN, Inc. • 500 S Main Street, Suite 115 • Mooresville, NC 28115 • United States • Tel. +1 877-927-6510 • contactDEHN@dehn.us • www.dehn.us

: Tested • NEU: New • : Discontinued Model
: Cross connector • : Longitudinal connector • : Parallel connector • : T connector • : Clamp for parallel connector • : Clamp for T connector
: Pipe clamp for parallel connector • : Pipe clamp for T connector • : Equipotential bonding bar • : Bridging component