
# Datasheet: Protective clothing ArcFit Indoor

## APT ID 23 (787 661)



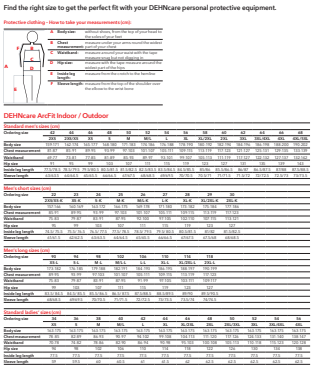


Dimension drawing

| Type | APT ID 23 |
|---|---|
| **Part No.** | **787 661** |
| Arc fault protection class (box test 7 kA / 0.5 s – single-pole) | APC 2 |
| Arc energy ($W_{arc}$ oder $W_{LBP}$) | 320 kJ |
| Material | **Cotton (52%), modacrylic (22%), viscose (19%), para-aramid (6%), static inhibitors (1%)** |
| Arc rating – ATPV (open arc) | 18 cal / cm² *) |
| Arc rating – ELIM (open arc) | 13 cal / cm² |
| PPE category (NFPA 70E) | PPE 2 |
| Weight per unit area | 450 g/m² |
| Material (sewing thread) | **Kevlar (100%)** |
| Standard | IEC 61482-2, EN ISO 11612, EN 1149-5, EN ISO 13688, EN ISO 11611, EN 17353 |
| Primary colour | grey |
| Secondary colour | black |
| Zipper | red |
| Size (international) | 23 (XS-K) |

| Masterdata | |
|---|---|
| Net weight | 1020 g/pc(s) |
| GTIN | 4013364490529 |
| PU | 1 pc(s) |
| Customs tariff number (Comb. Nomenclature EU) | 62034211 |

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.

*) Outer fabric after preparation

© DEHN, Inc. • 500 S Main Street, Suite 115 • Mooresville, NC 28115 • United States • Tel. +1 877-927-6510 • contactDEHN@dehn.us • www.dehn.us

: Tested • NEU: New • : Discontinued Model
: Cross connector • : Longitudinal connector • : Parallel connector • : T connector • : Clamp for parallel connector • : Clamp for T connector
: Pipe clamp for parallel connector • : Pipe clamp for T connector • : Equipotential bonding bar • : Bridging component