
Datasheet: Protective clothing ArcFit Indoor

APT ID F 54 (787 690)



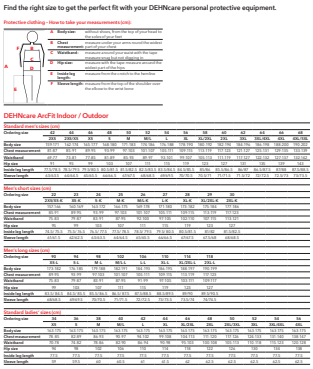

Dimension drawing

Type	APT ID F 54
Part No.	**787 690**
Arc fault protection class (box test 7 kA / 0.5 s – single-pole)	APC 2
Arc energy (W_{arc} oder W_{LBP})	320 kJ
Material	**Cotton (52%), modacrylic (22%), viscose (19%), para-aramid (6%), static inhibitors (1%)**
Arc rating – ATPV (open arc)	18 cal / cm² *)
Arc rating – ELIM (open arc)	13 cal / cm²
PPE category (NFPA 70E)	PPE 2
Weight per unit area	450 g/m²
Material (sewing thread)	**Kevlar (100%)**
Standard	IEC 61482-2, EN ISO 11612, EN 1149-5, EN ISO 13688, EN ISO 11611, EN 17353
Primary colour	grey
Secondary colour	black
Zipper	red
Size (international)	54 (3XL/4XL)

Masterdata	
Net weight	878 g/pc(s)
GTIN	4013364490789
PU	1 pc(s)
Customs tariff number (Comb. Nomenclature EU)	62034211

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.

*) Outer fabric after preparation

© DEHN, Inc. • 500 S Main Street, Suite 115 • Mooresville, NC 28115 • United States • Tel. +1 877-927-6510 • contactDEHN@dehn.us • www.dehn.us

: Tested • NEU: New • : Discontinued Model
: Cross connector • : Longitudinal connector • : Parallel connector • : T connector • : Clamp for parallel connector • : Clamp for T connector
: Pipe clamp for parallel connector • : Pipe clamp for T connector • : Equipotential bonding bar • : Bridging component