
Protection module for DEHNguard M, ... S and DEHNgap C S


DG MOD 275 VA (952027)

- High discharge capacity due to heavy-duty zinc oxide varistors / spark gaps
- Easy replacement of protection modules without tools due to module locking system with module release button
- The plug-in protection module can be replaced without switching off the mains voltage and without removing the distribution board cover





Basic circuit diagram

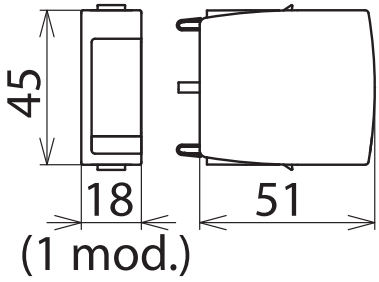

Dimension drawing

Protection module for DEHNguard S ... VA surge arresters comprising a varistor connected in series with a spark gap.

Type	**DG MOD 275 VA**
Part No.	**952027**
Nominal discharge current (8/20 µs) (I_n)	10 kA
Max. discharge current (8/20 µs) (I_{max})	20 kA
Max. continuous operating a.c. voltage (U_c)	275 V
Max. continuous operating voltage DC (U_c)	350 V

Masterdata	
Net weight	1 pc(s)/st
Customs tariff number (Comb. Nomenclature EU)	85363030
GTIN	4013364127364
PU	1 st

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.

© DEHN, Inc. • 500 S Main Street, Suite 115 • Mooresville, NC 28115 • United States • Tel. +1 877-927-6510 • contactDEHN@dehn.us • www.dehn.us

: Tested • NEU: New • !: Discontinued Model
: Cross connector • : Longitudinal connector • : Parallel connector • : T connector • : Clamp for parallel connector • : Clamp for T connector
: Pipe clamp for parallel connector • : Pipe clamp for T connector • : Equipotential bonding bar • : Bridging component